

(12) UK Patent Application (19) GB (11) 2 391 650 (13) A

(43) Date of A Publication 11.02.2004

(21) Application No: 0230149.7

(22) Date of Filing: 24.12.2002

(30) Priority Data:
 (31) 60344454 (32) 26.12.2001 (33) US
 (31) 60371600 (32) 02.04.2002
 (31) 60371612 (32) 08.04.2002
 (31) 60417678 (32) 07.10.2002
 (31) 60419223 (32) 13.10.2002
 (31) 60424635 (32) 05.11.2002

(51) INT CL⁷:
G06F 1/00

(52) UK CL (Edition W):
G4A AAP A23A A23B A23E A23X

(56) Documents Cited:
WO 2001/092981 A2

(58) Field of Search:
UK CL (Edition V) G4A
INT CL⁷ G06F
Other: ONLINE:WPI,EPDOC,JAPIO/PAJ


(71) Applicant(s):
SecureOL (Israel) Ltd.
(Incorporated in Israel)
21 Ahad Haam St., Jerusalem 92151, Israel

(72) Inventor(s):
Yaron Mayer
Zak Dechovich

(74) Agent and/or Address for Service:
Kilburn & Strobe
20 Red Lion Street, LONDON, WC1R 4PJ,
United Kingdom

(54) Abstract Title: Computer security arrangement for protection against malicious attacks

(57) A security arrangement for a computer uses a system of rules to detect unusual behaviour, notify the user of unusual behaviour and learn acceptable behaviour patterns. It also automatically segregates programs, monitors the amount of data sent out, blocks certain activities, prevents malicious software from falsifying the user's input and segregates programs into their natural environments. A security arrangement with a device driver or OS in ring 0 is also described as is a security arrangement where some of the OS functions are replaced. The arrangement may be applied to a storage medium.

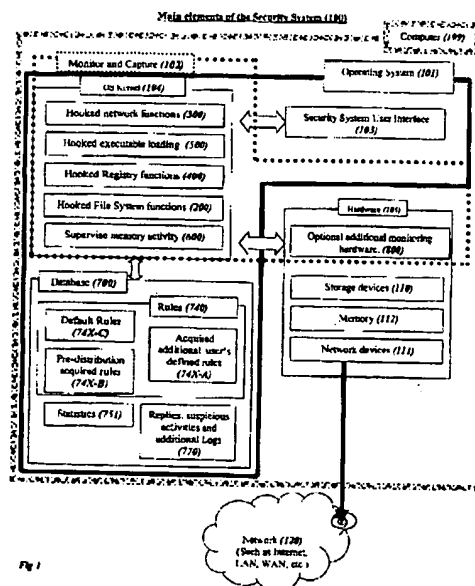

BEST AVAILABLE COPY

GB 2 391 650 A

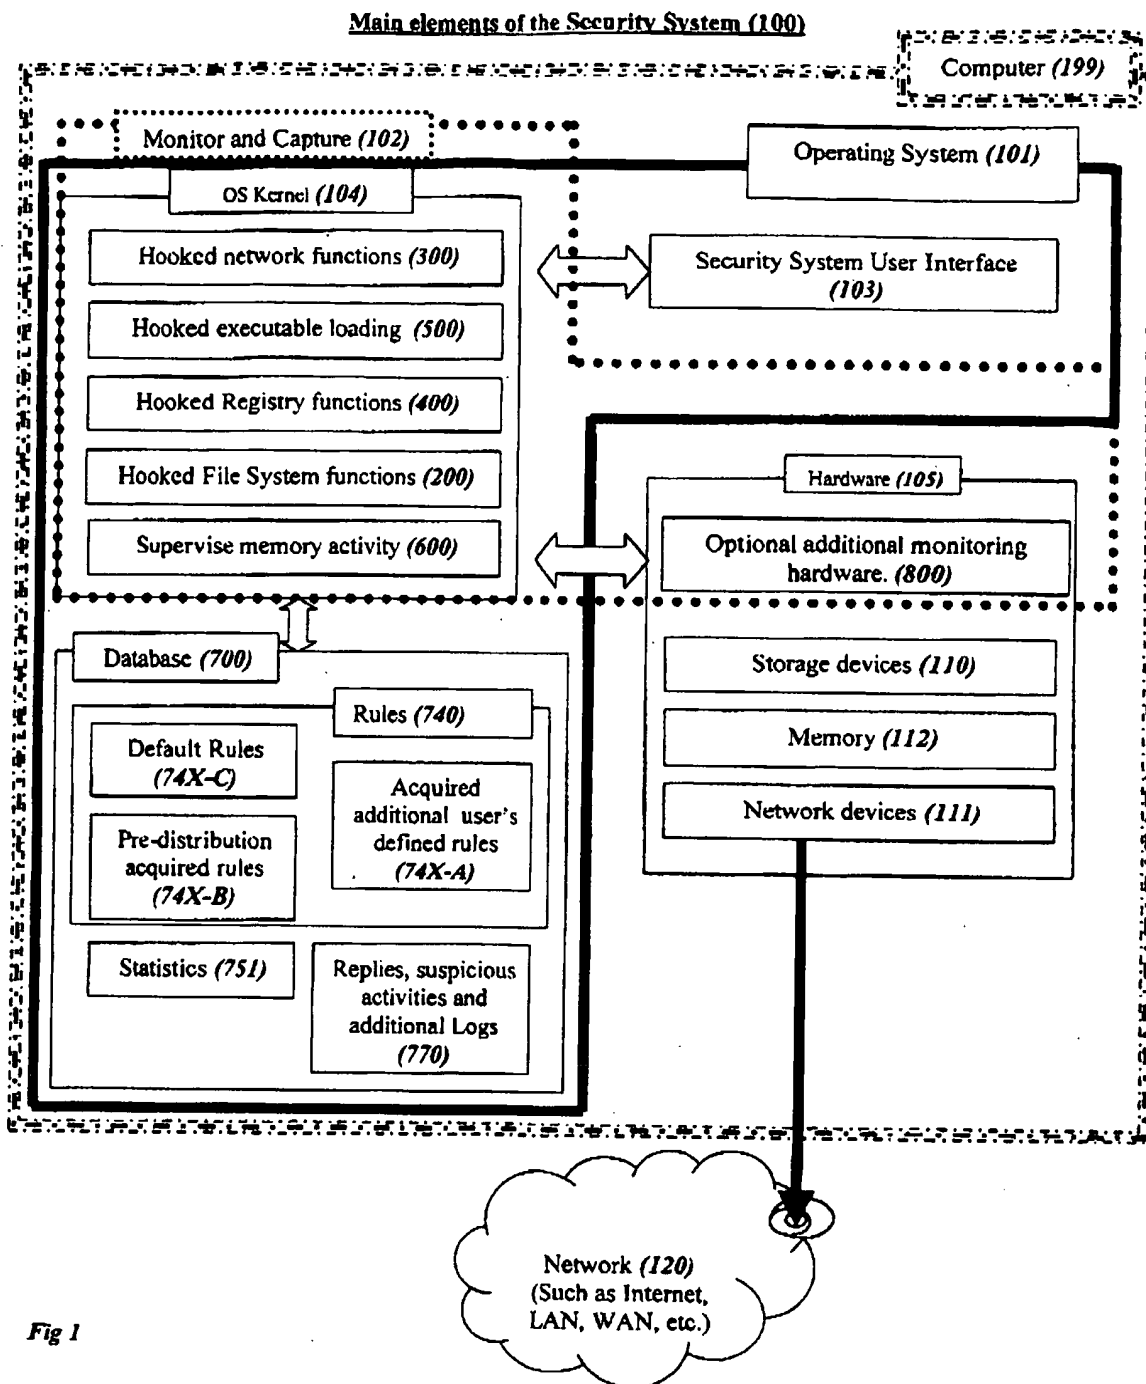


Fig 1

Interaction between Security System parts overview (1100)

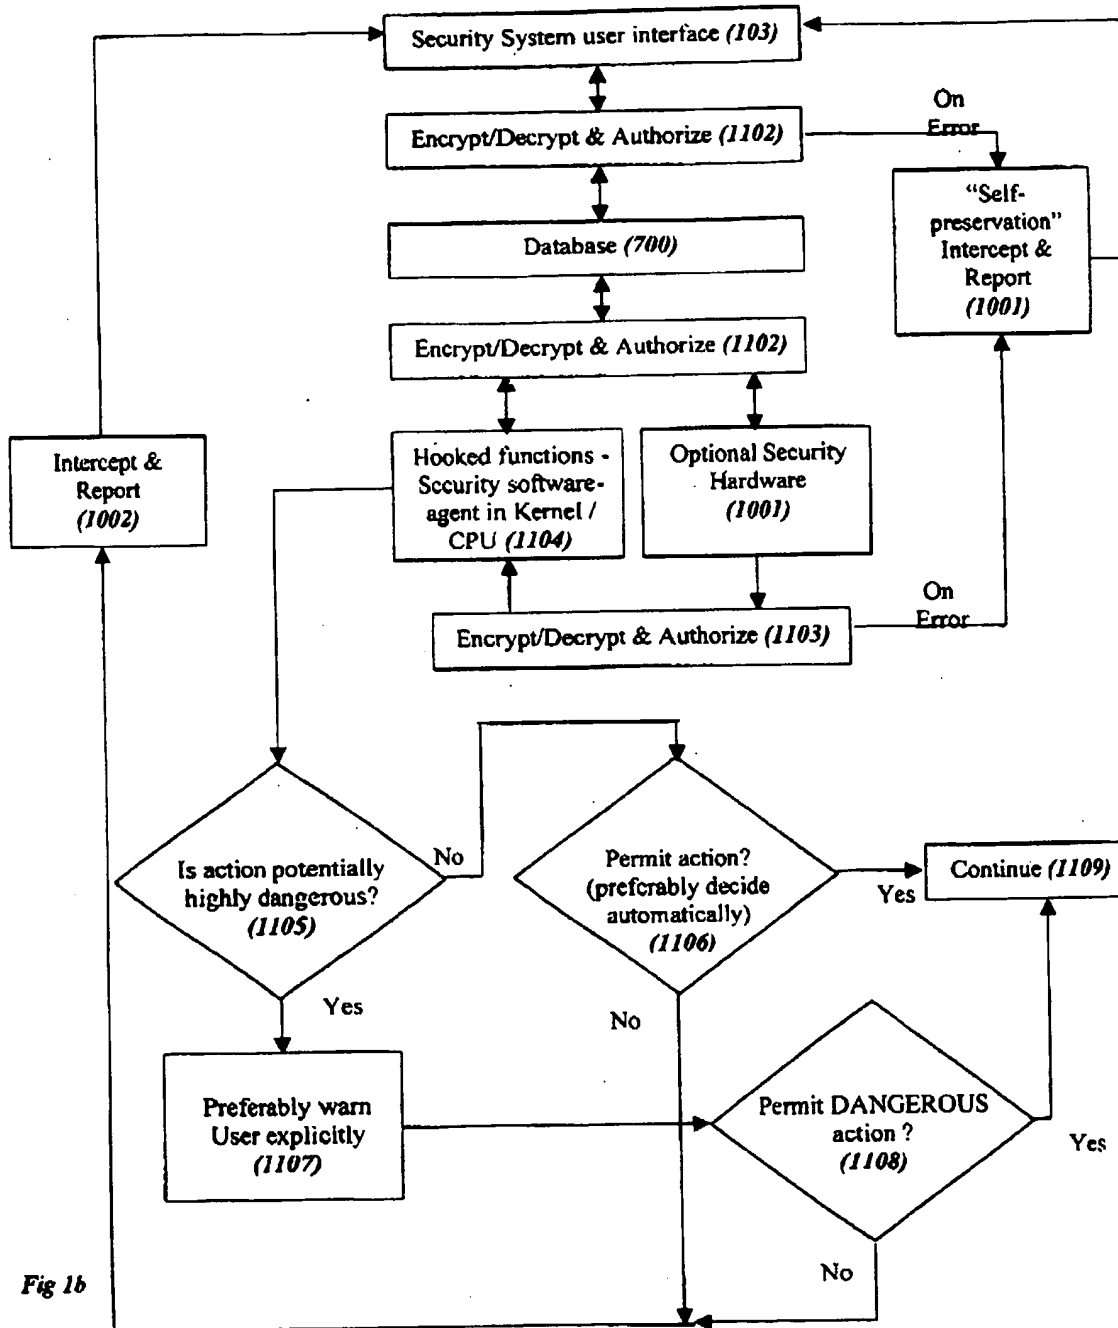


Fig 1b

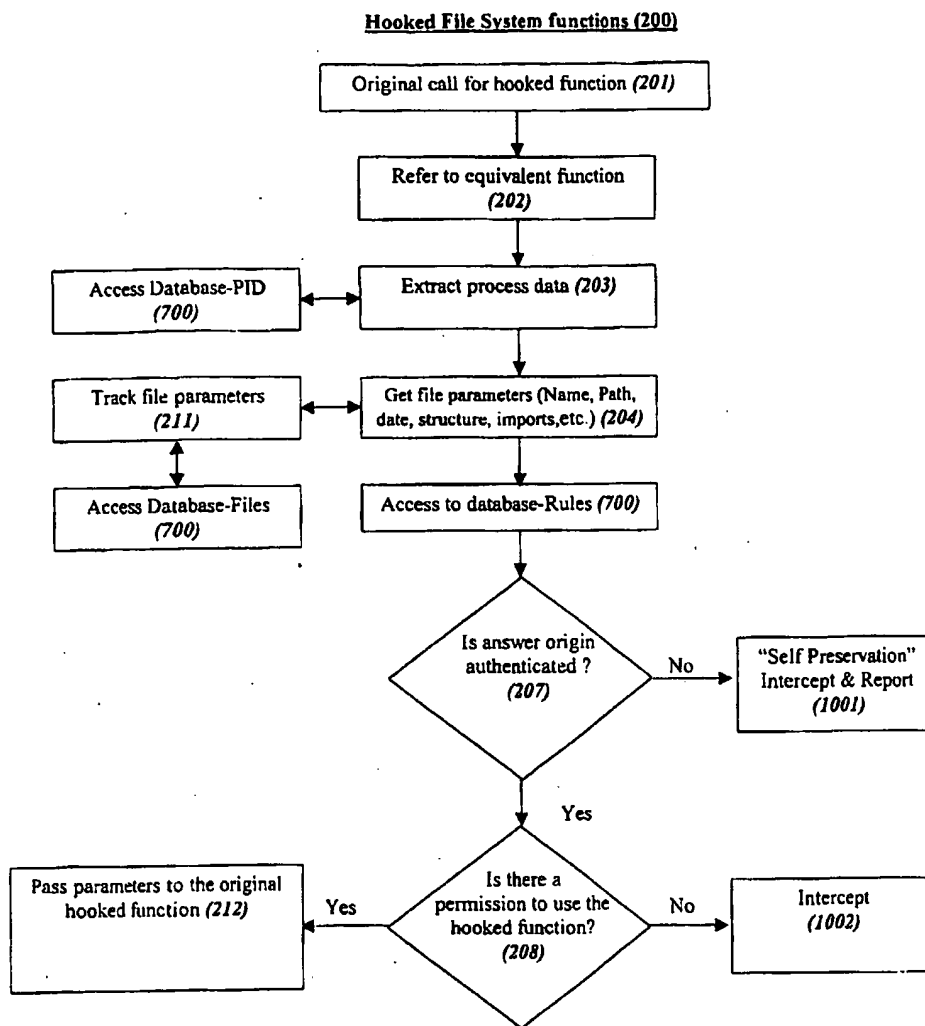


Fig. 2

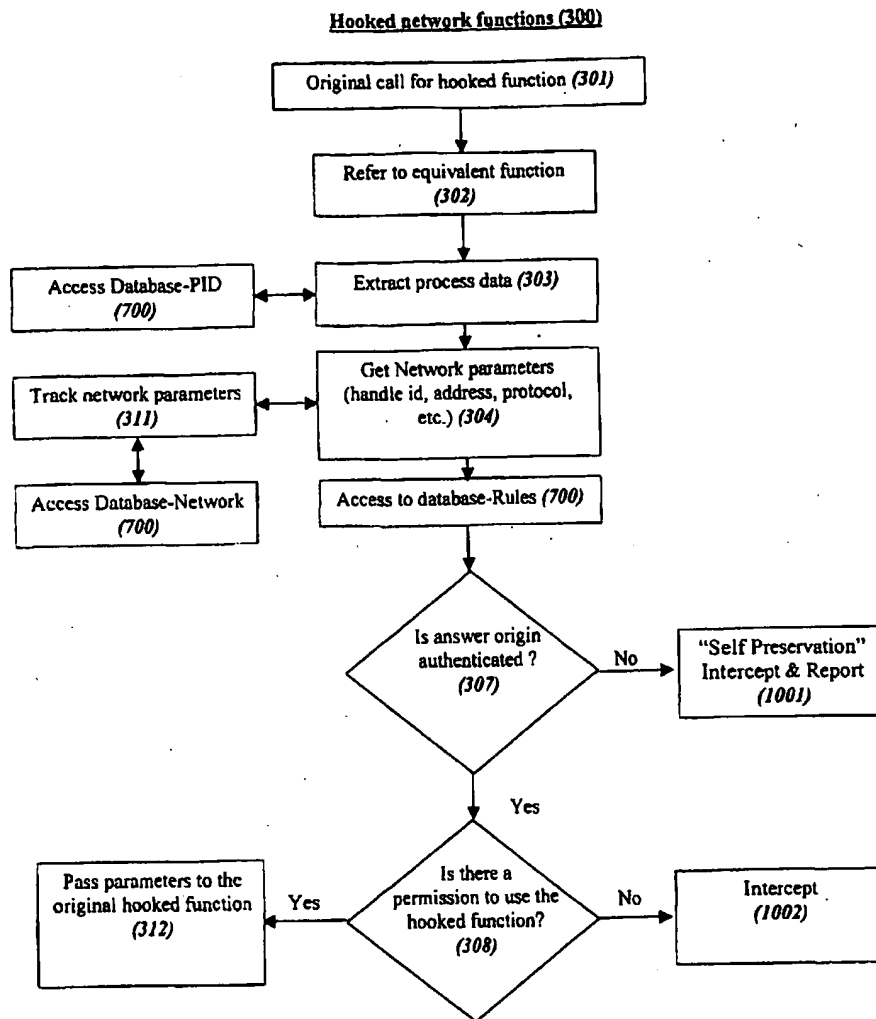


Fig. 3

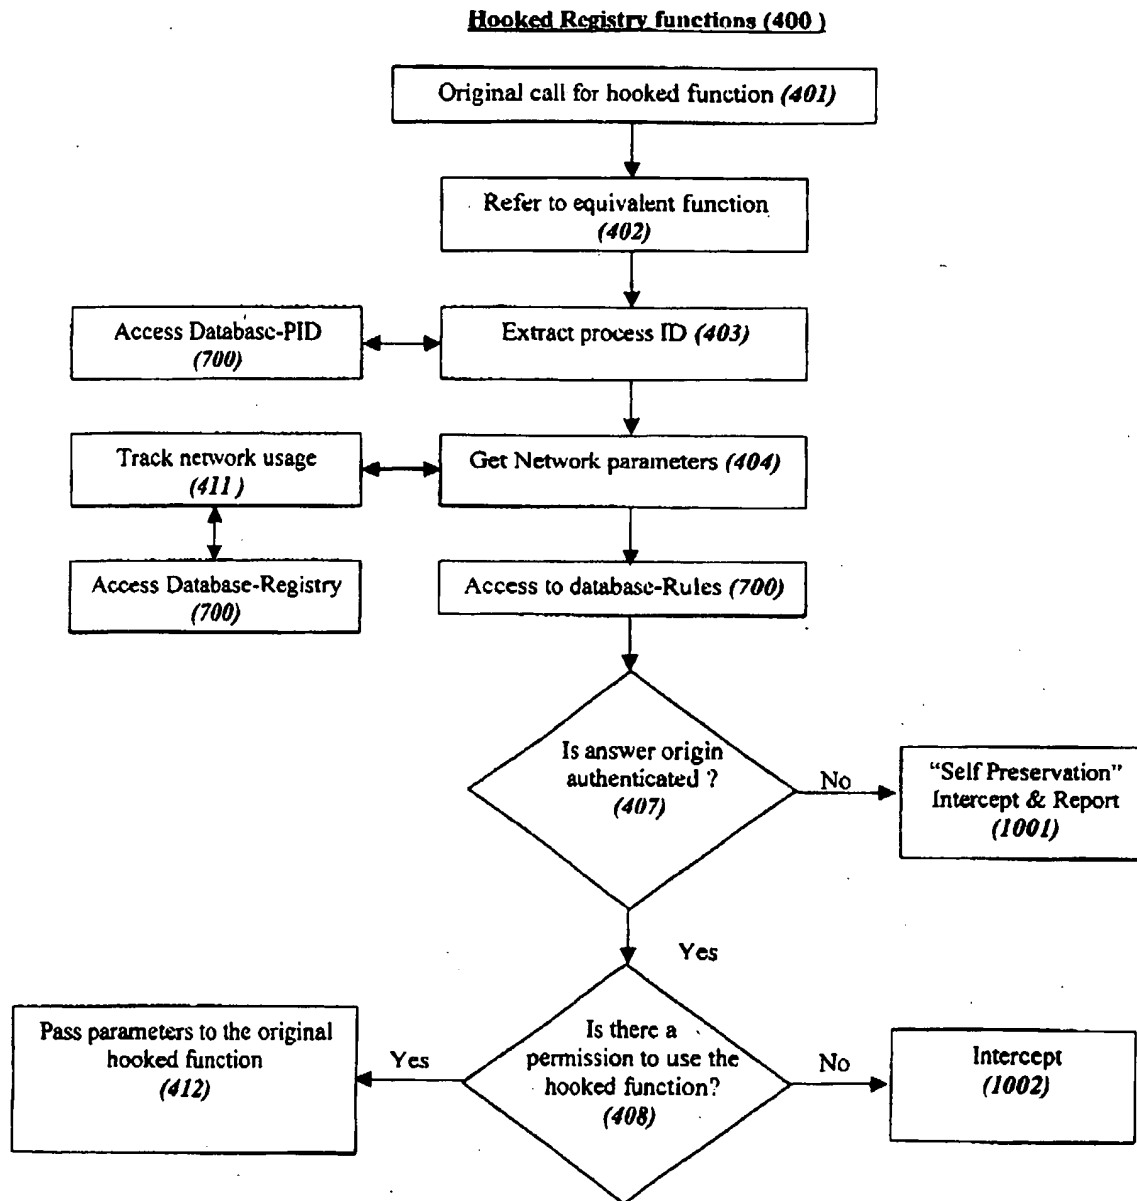


Fig 4

6/13

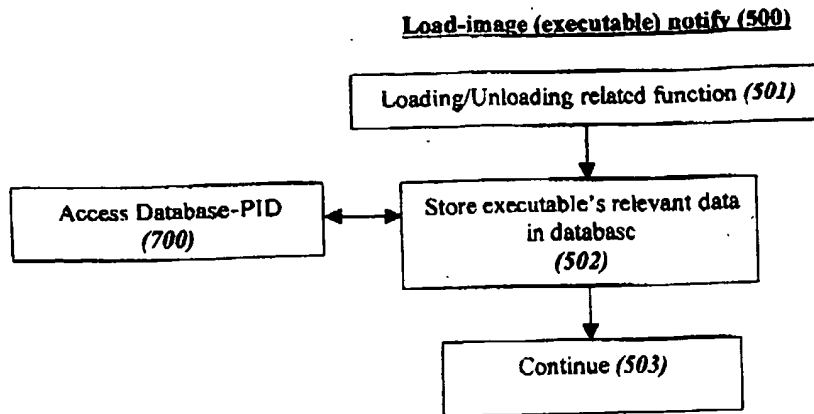


Fig 5

7/13

Supervise memory activity (to the extent possible) (600)

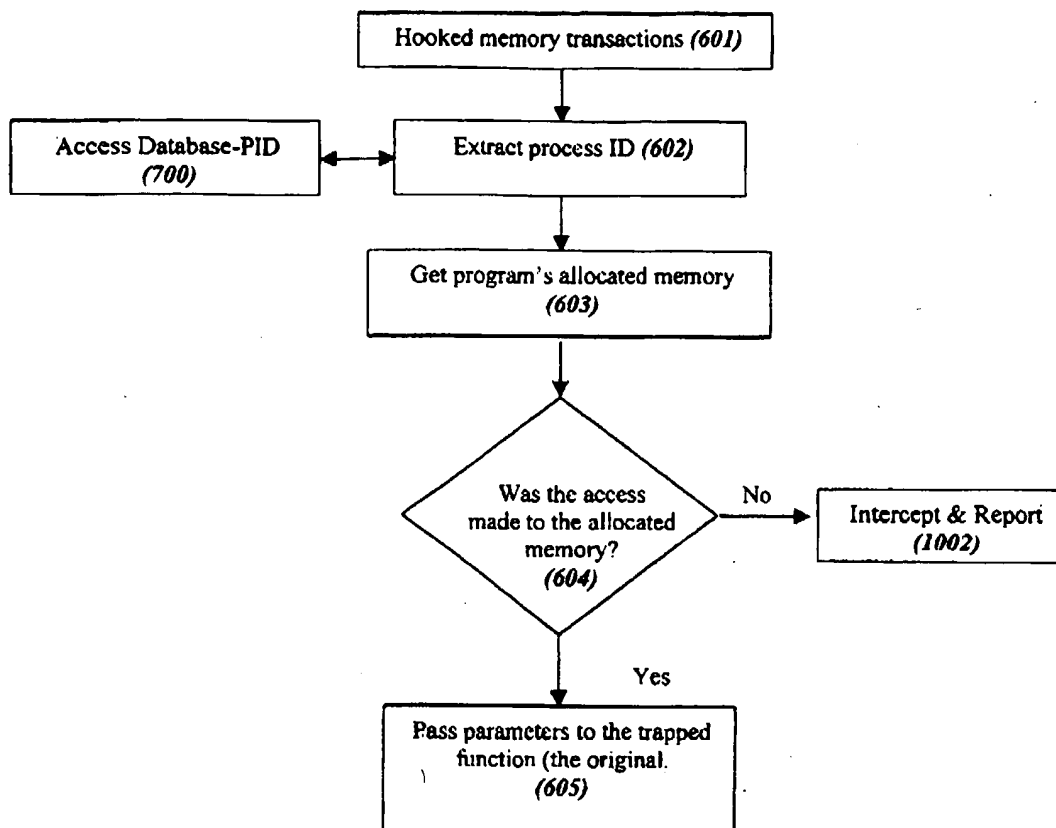


Fig 6

8/13

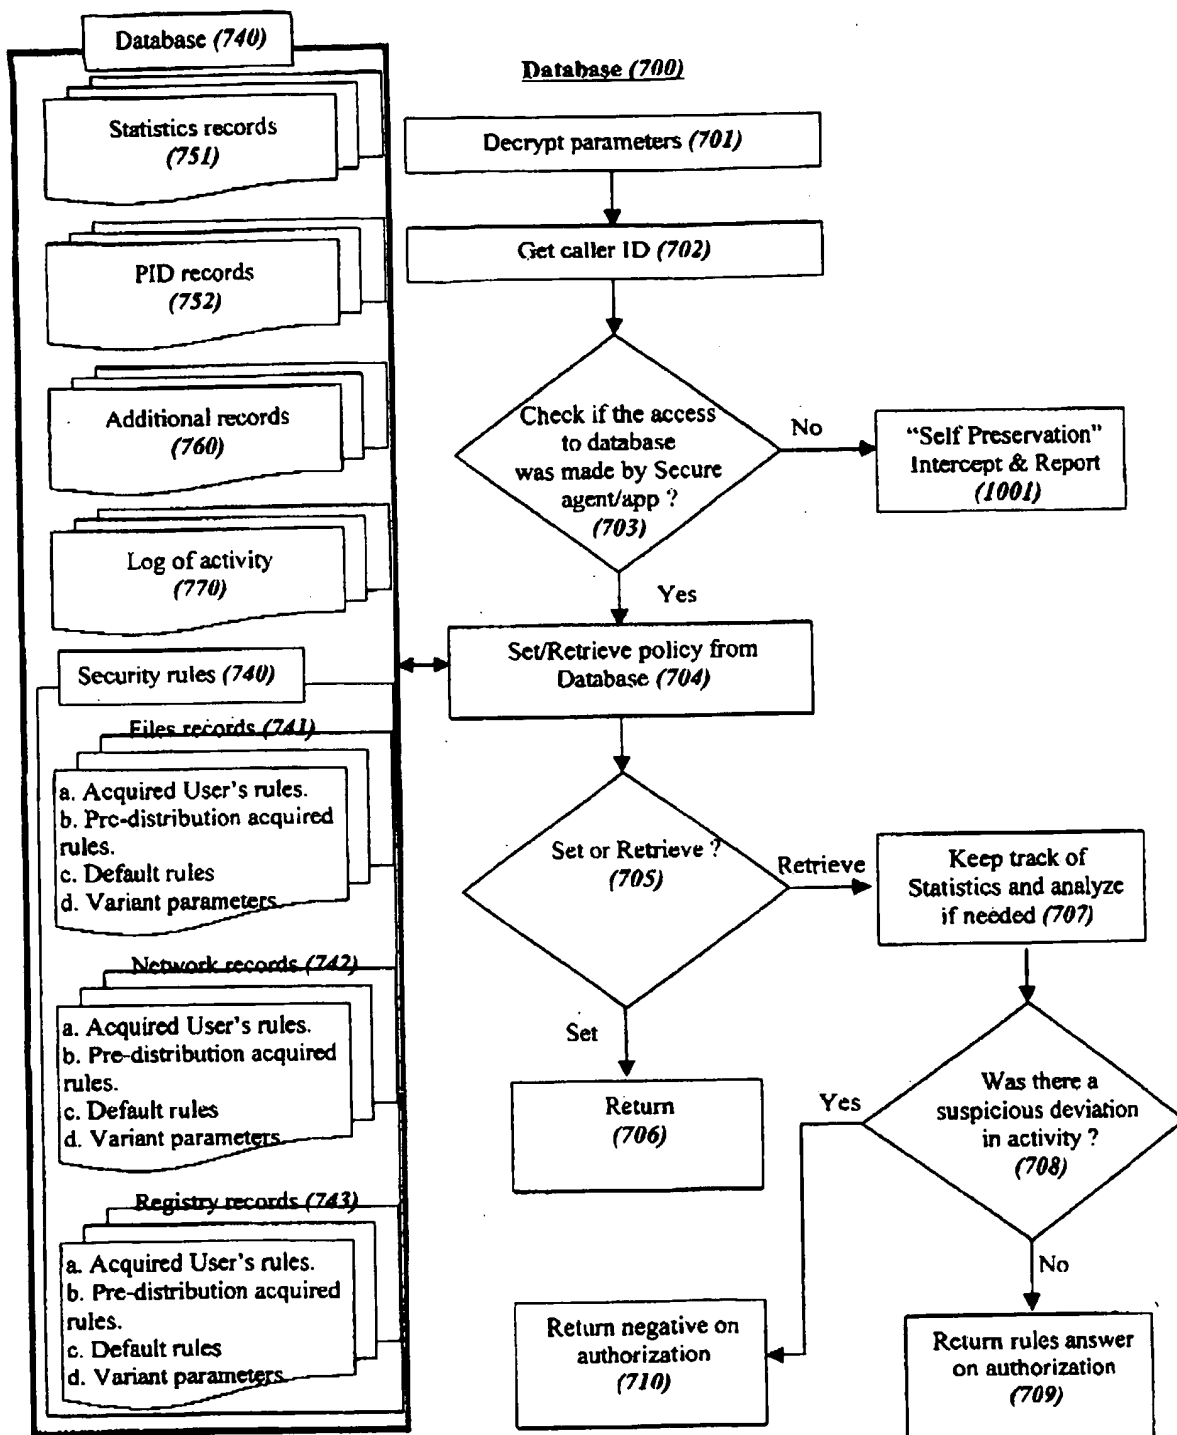


Fig 7

9/13

Optional additional monitoring hardware. (800)

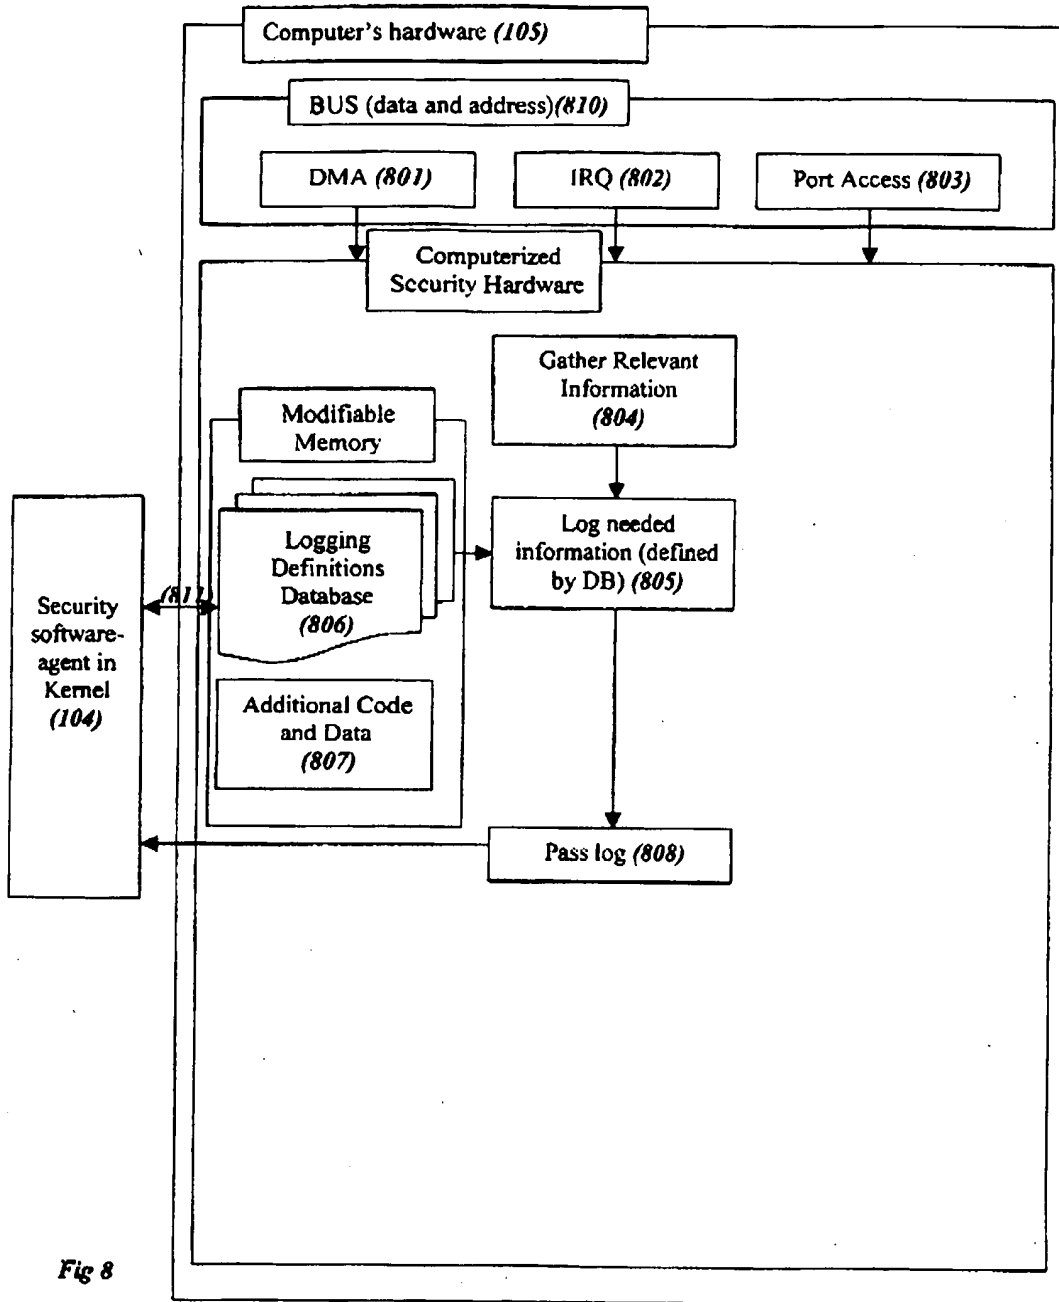


Fig 8

10/13

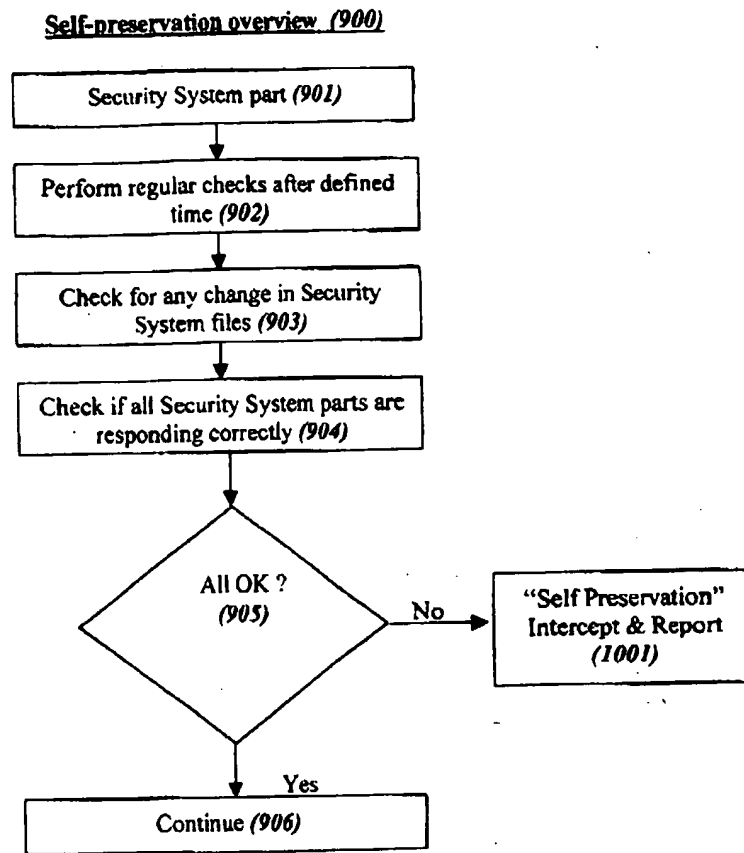


Fig 9

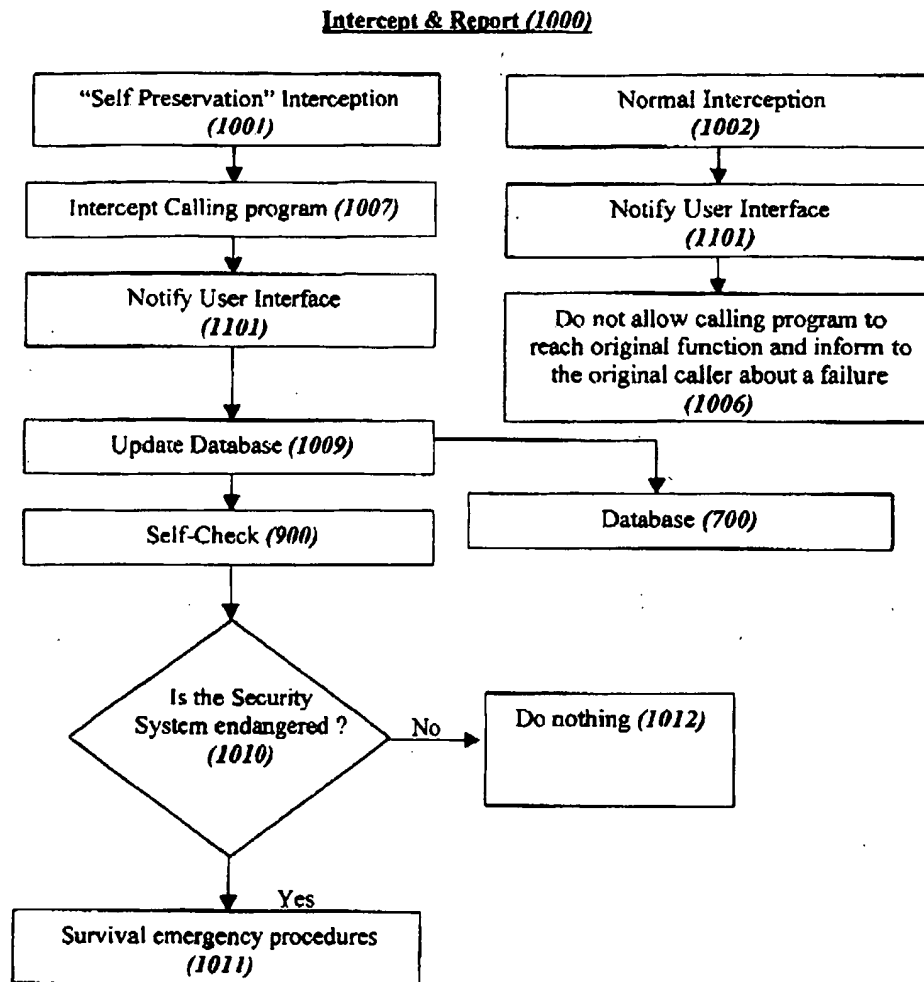
**Fig 10**

Fig. 11

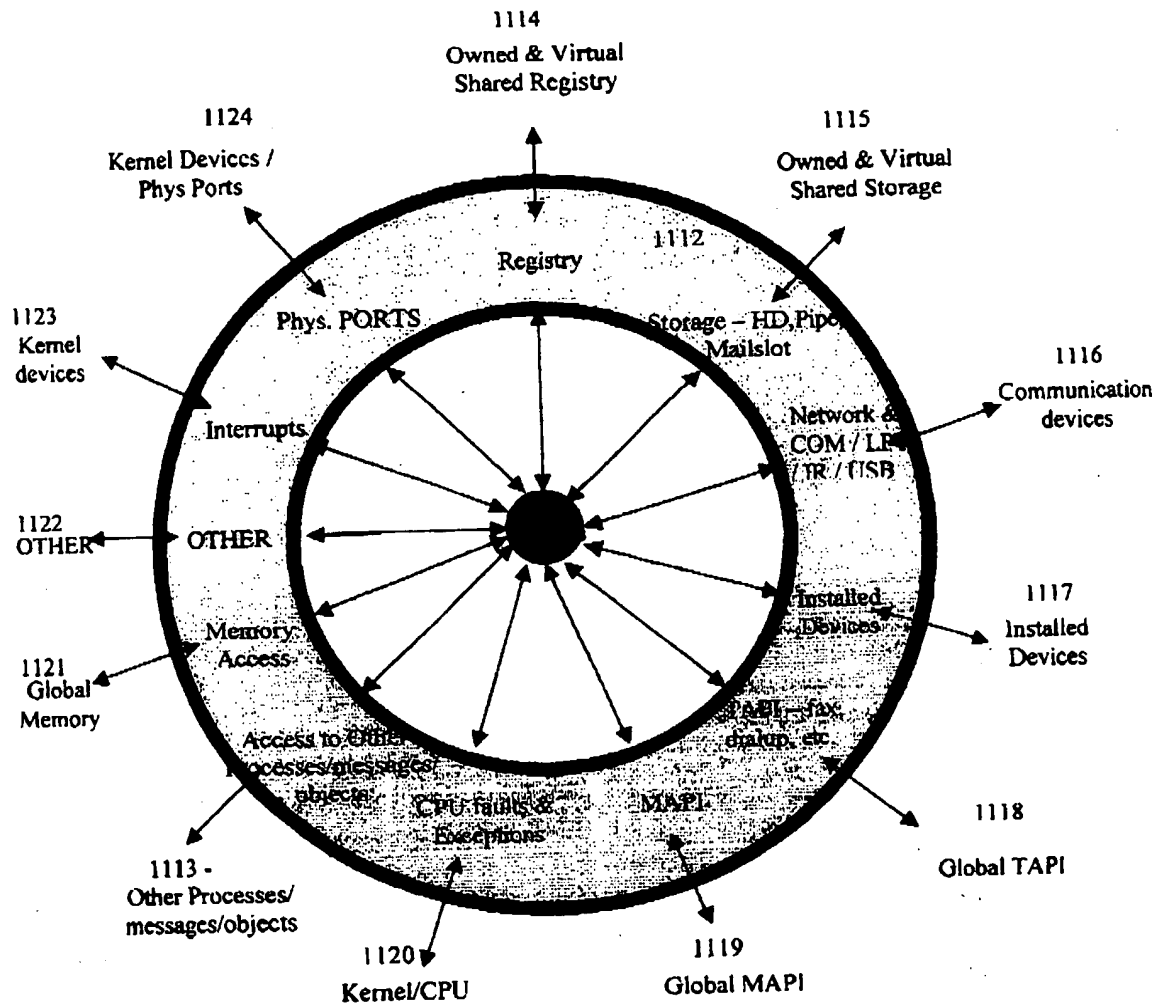


Fig. 12


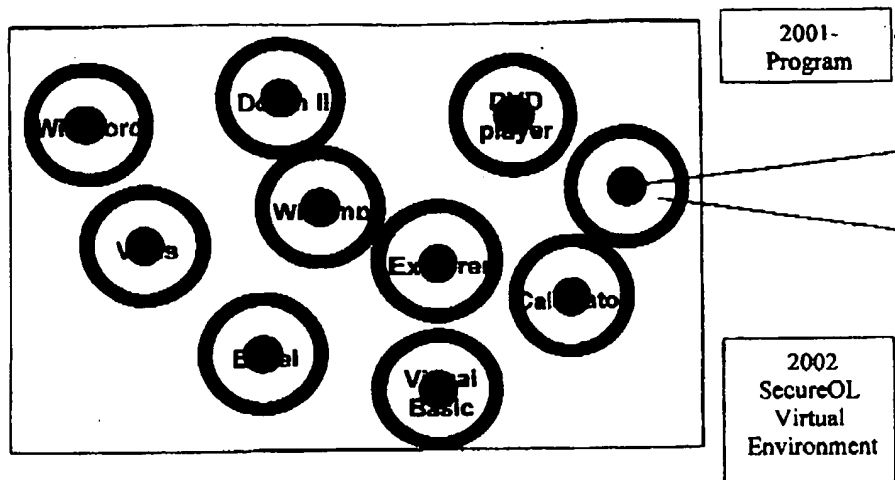


Fig. 13

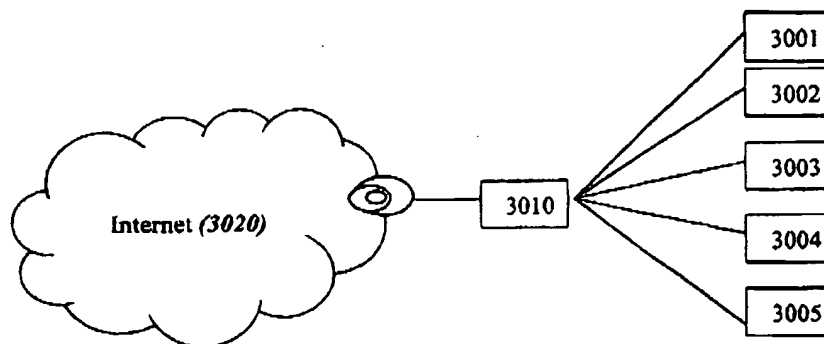

(**System and method for comprehensive general generic protection for computers against malicious programs that may steal information and/or cause damages.**

This patent application is a continuation-in part of PCT application PCT/IL 01/00487 which was filed in Israel on May 28, 2001, hereby incorporated by reference in its entirety, which claims priority from Israeli patent application 136414 of May 28, 2000 and from US provisional patent application 60/209,593 of June 6, 2000, and from US Provisional patent application 60/284,019 of April 15, 2001.

This patent application also claims benefit and priorities from the following US Provisional patent applications, hereby incorporated by reference in their entirety:

60/344,454 of Dec. 26, 2001

60/371,600 of Apr. 2, 2002

60/371,612 of Apr. 8, 2002

60/417,678 of Oct. 7, 2002

60/419,223 of Oct. 13, 2002

60/424,635 of Nov. 5, 2002

Abstract

Malicious software attacks (such as for example stealing data, changing data or destroying data) on personal computers and/or servers and/or other computerized gadgets (especially through the Internet) are becoming more and more common and more and more dangerous, causing damages of tens of billions of dollars each year. The state-of-the-art solutions are inherently limited because they solve only a limited number of problems on the surface, instead of going deeply into the roots of the problem. The most common solutions are Anti-viruses and firewalls. Anti-viruses are limited because they can only detect known viruses or worms that have already been identified (usually after they have already attacked many computers). Network firewalls are typically based on packet filtering, which is limited in principle, since the rules of which packets to accept or not may contain for example subjective decisions based on trusting certain sites or certain applications. However, once security is breached for any reason, for example due to an error or intended deception, a hostile application may take over the computer or server or the entire network and create unlimited damages (directly or by opening the door to additional malicious applications). They are also not effective against security holes for example in browsers or e-mail programs or in the operating system itself. According to an article in ZDnet from Jan 24, 2001, security holes in critical applications are discovered so often that just keeping up with all the patches is

(impractical. Also, without proper generic protection for example against Trojan horses, which can identify any malicious program without prior knowledge about it, even VPNs (Virtual Private Networks) and other form of data encryption, including digital signatures, are not really safe because the info can be stolen before or below the encryption. Even personal firewalls are typically limited, because once a program is allowed to access the Internet, there are no other limitations for example on what files it may access and send or what it might do. The present invention creates a general generic comprehensive solution by going deeply into the roots of the problem. One of the biggest absurdities of the state-of-the-art situation is that by default programs are allowed to do whatever they like to other programs or to their data files or to critical files of the operating system, which is as absurd as letting a guest in a hotel bother any other guests as he pleases, steal their property or copy it or destroy it, destroy their rooms, etc., or for example have free access to the hotel's safe or electronic switchboard or phone or elevator control room. The present concept is based on automatic segregation between programs: It is like limiting each guest by default to his room and limiting by default his access to the Hotel's strategic resources, so that only by explicit permission each guest can get additional privileges.

Background of the invention

Field of the invention:

The present invention relates to security in computers (including personal computers, servers, or other computerized gadgets, as explained in the definitions) and more specifically to a powerful comprehensive generic Security System and method for computers, based on automatic segregation between programs.

Background

Malicious software attacks on personal computers and/or servers (especially through the Internet) are becoming more and more common and more and more dangerous. According to recent study by the American CSI research institute (The Computer Security Institute), during the last year alone approximately 50 percent of the largest American companies were attacked by at least one malicious Internet software, with an average damage of about 500,000 USD per attack.

As the attacks for example by the "I LOVE YOU" virus and its derivatives demonstrate, which affected almost instantly tens of millions of computers and caused estimated damages of more than 10 billion dollars - the conventional anti-virus programs and their methods are inadequate to handle such threats because they are dependent on past familiar code patterns of known malicious software instead of trying to prevent in advance all kinds of attacks in principle. Such attacks are enabled because of an almost infinite number of loopholes and vulnerabilities in operating systems, by the fact that far too many processes occur under the surface without the user's knowledge, and by badly-engineered applications. These loopholes and vulnerabilities include for example:

1. The possibility of attempting to connect from the outside to the user's computer while the user is surfing on the net, without any warning to the user that such attempt is being made.
2. The readiness of certain applications to execute Macro commands or scripts or applets or other executable attachments from incoming e-mail messages or web pages without any warning and without asking for the user's authorization, and without checking what these executables or scripts try to do (if allowed to run).
3. The ability of applications to open a network connection to the outside without any warning or request of authorization from the user.
4. The ability of applications to perform extremely dangerous operations such as for example deleting or sabotaging multiple files or making changes to sensitive system areas or formatting entire drives without warning the user and requesting authorization from the user.
5. Lack of checks against string overflow or buffer overflow in some communication applications so that they can be crashed for example by large

(strings that contain malicious code that overwrite part of the original program's code and starts running instead of the original code.

Unless these vulnerabilities and loopholes are treated on the most thorough and basic level, and since the Internet keeps growing at an exponential rate and more and more businesses are becoming dependent on it - such attacks may increase in the near future to the point of almost unlimited damages to a very large percent of the computers that are connected to the Internet.

Other methods such as for example packet filtering are also limited in principle, since the rules of which packets to accept or not may contain for example subjective decisions based on trusting certain sites or certain applications. However, once security is breached for any reason, for example due to an error or intended deception, a hostile application may take over the computer or server or the entire network and create unlimited damages (directly or by opening the door to additional malicious applications), which until detected might be already too late to repair. For example, a self-resendable via e-mail macro-virus (such as for example "I LOVE YOU" and its derivatives and similar viruses) can arrive from your best and most trusted friends after their own computer has been compromised. Also, filtering for allowed types of protocols such as for example FTP versus SMTP and so on can be rendered useless by programs that encrypt or disguise a given protocol type to appear as another. Another major limitation of packet filtering is that it can't be relied upon to scan for stolen data in packets, since malicious applications can encrypt the data and/or disguise it to look like something else, so as to appear for example as a gif image.

Antiviruses and firewalls are also not effective against security holes for example in browsers or e-mail programs or in the operating system itself. According to an article in ZDnet from Jan 24, 2001, security holes in critical applications are discovered so often that just keeping up with all the patches is impractical. Also, without proper generic protection for example against Trojan horses, which can identify any malicious program without prior knowledge about it, even VPNs (Virtual Private Networks) and other form of data encryption, including digital signatures, are not really safe because the info can be stolen before or below the encryption.

Even attempts to monitor in some ways a certain group of specifically marked executables or applications are limited by nature, because the security breaches can come from many other directions. For example, A Trojan horse may already be lurking in the system for a long time and then suddenly create tremendous damage before being detected, or enter the system any time new applications are installed from any source.

On the other hand, attempts for example to disallow completely any script within e-mail attachments to execute creates too many restrictions and doesn't separate between safe scripts that the user may want to run and scripts that actually try to perform malicious acts.

Summary of the invention

The present invention is a novel concept which tries to go deeply into the roots of the causes of above described problems and thus to eliminate completely the above-described problems by creating what is to the best of our knowledge a very powerful, comprehensive, general and generic Security System for computers. This System and method is adapted to protect computers (which may include for example personal computers, servers, and other devices or gadgets with one or more processor that can run programs, as explained below in the definitions) against all kinds of malicious programs that may steal information and/or cause damages including for example changes of data, deletion of data, interfering with function, and so on (such as for example Viruses, Vandals, Trojan horses, Worms, Macro viruses and Malicious e-mails). The system and method can be used in many operating systems, such as for example various platforms of Microsoft Windows, Linux, Macintosh, or other operating systems, even though the preferred embodiments use mainly the terminology of Windows, which is the most common and familiar operating system.

The most important principles and objects of this protection system preferably include:

1. Preferably giving the user more information about processes that would normally occur without his knowledge, thus decreasing substantially the chance that malicious software will be able to mislead or deceive the user.
2. Defining preferably comprehensive yet parsimonious sets of rules of appropriate behavior of software so that the system can identify and intercept immediately programs that may be performing or trying to perform suspicious and/or detrimental and/or potentially dangerous activities or not behaving as usual.
3. Monitoring and intercepting and possibly logging all unauthorized and/or suspect activities in the computer and/or asking for authorization or guidance when required.
4. The above-described principles preferably allow multiple safeguards against security threats, so that malicious applications will usually have to break multiple security rules in order to do such things as stealing data, damaging data or propagating themselves, and thus the chance for catching them is much larger.
5. Even if the user allows a certain application to launch another application, the newly launched application or applications are preferably again subjected in turn to all the same monitoring and rules as any other application and/or for example to the limitations that apply to the launching application, so that the scanning for breach of security rules continues to apply at all stages.
6. Since the possibility of encryption by malicious programs which try to steal and send data over communication channels makes it impossible to make sure by monitoring the information flow itself that data is not being stolen – therefore the system preferably relies mainly on allowing the user maximum control over which applications can access which data, which

applications are authorized to access which communication channels, and preferably also how much data is actually being sent.

The above protection system is preferably comprised of the following main elements:

1. A monitoring and capturing system, which preferably constantly monitors the security-sensitive elements of the computer system, and most importantly all the relevant peripheral device activities, and preferably especially those related to storage devices (and especially the Hard disk or hard disks) and communication devices (network cards, modem, etc.) and can detect and intercept immediately suspicious or dangerous behavior.
2. The security rules and a database (or databases) for storing the default rules, which preferably contain at least one of: a set of pre-distribution preferably acquired rules that are good for most users of the selected operating system, acquired additional user-defined rules, and statistics of normal or reasonable behavior of programs, which is continuously learned during the operation of the system. This database area, preferably contains also all the authorizations and optionally (in some embodiments) also for example a log of all the questions that the Security System asked the user and his replies (kept at least for a certain period), and when needed, also a log of suspicious activities detected (kept at least for a certain period) and may contain also definable additional logs. The database is preferably encrypted and is considered a constantly monitored high-security protected and preferably backed-up area as defined below in the detailed description
3. A user interface, which interacts with the user preferably in order to at least one of: learn acceptable behavior patterns, warn the user of perceived dangers when needed, and ask for the user's authorization when needed. Preferably it also allows the user to view statistics of behavior of important programs and/or groups of programs and especially programs that are allowed to access communication channels, especially in what is related to sending and receiving data over the communication lines, such as for example since the beginning of the current Internet session or for a certain time period. Preferably, this may also include information such as for example what protocols were used, etc. Preferably the user may also view or modify directly the database of authorizations or at least parts of it.

The main functions performed by Security System:

The main logic behind the rules that define appropriate versus suspect behavior is preventing as much as possible all the elements and activities that are required by malicious programs in order to be able steal any data or do any damage or propagate themselves. The Security System preferably uses a set of heuristics and basic rules for defining suspicious or potentially dangerous activities that are automatically suitable for most users. By using the general default rules and adding to them for example statistical analysis of normal system and applications behavior and what is learned from the user's responses to authorization requests, the Security System quickly learns what is considered reasonable or well-behaved behavior of programs on the user's personal computer or server. Preferably, some of the learning is performed in

advance for each operating system and is included in the distribution database, so that the system that is installed by the user has already learned various rules that are relevant by default to most users of that operating system. The security rules and functions performed by the Security System preferably include at least some of the following:

- a. Constantly monitoring the security-sensitive elements of the computer system, preferably including all relevant peripheral device activities, and especially storage devices and communication devices, and preferably detecting and selectively intercepting any suspicious or dangerous behavior and acting upon it in accordance with the default and acquired sets of security rules.
- b. Default segregation of programs into their natural environments, as defined below in the detailed description. This feature is very important.
- c. Preferably warning the user and request for authorization for security-sensitive activities and especially any first-time attempts to access communication channels.
- d. Preferably constant and stricter monitoring and protection of areas defined in the various rule sets as higher security areas on the storage media, as defined below in the detailed description.
- e. Interception and more explicit warning of the user about potentially highly dangerous activities.
- f. Preferably warning the user about significant statistical deviations from normal behaviors of applications and/or of the operating system and especially as relates to suddenly sending out large amounts of data.
- g. Allowing the User to request automatic immediate interception and/or warning the user of any attempts of external programs from the network to connect to the user's computer through the communication channels.
- h. Preferably allowing the User to request enforcing of general limitations on the communication ports allowed to be opened and optionally also limitations on types of protocols allowed.
- i. Preferably monitoring and intercepting as much as possible all attempts of applications to gain direct port accesses to security sensitive devices and especially the storage media and the communication channels.

Therefore, the present invention offers the following main advantages over the prior art:

1. It is adapted to generic detection and interception of all kinds and variations of viruses, Trojan horses, worms, E-mail macro viruses and other vandals even when these are completely new and not similar to other vandals encountered before. Therefore, it can also detect and intercept first strike attacks, instead of waiting for a cure after the damage has already been done to tens of millions of computers.
2. It is not dependent on constant updates of virus knowledge bases, unlike normal anti virus systems.

3. It is not dependent on inherently limited methods, such as for example packet filtering.
4. It preferably offers multiple safeguards against various threats, so that a malicious program will typically have to break multiple security rules (for example, try to exceed its natural environments, try to access any of the communication devices without permission, try modify important system files, try to delete directories, try to modify other executables, etc.), and thus have a much higher chance for being caught. Also, preferably it gives the user more knowledge of what is happening in his system and therefore reduces significantly the chance of the user being misled or deceived by malicious applications.
5. It is more comprehensive than other solutions and may even at least is some embodiments catch and intercept backdoors that might exist in the operating system itself. Also, it is not dependent on marking a limited group of applications for being monitored, so that all applications are checked, no matter how they are introduced to the system, including if they were there even before the Security System was installed.
6. It is parsimonious in nature, so that it preferably doesn't need specific knowledge about the exact nature of specific programs such as for example various browsers or e-mail programs, and therefore also no updates are needed when the user downloads for example new versions or kinds of Internet applications. However, preferably the security system may incorporate updates and/or other globally-acquired knowledge in order to improve itself.
7. Malicious behaviors of programs can be detected and/or intercepted even if they don't display viral or worm-like behavior at all, for example if a screen saver starts to steal data and send it out over communication lines even if it does not show any attempts to spread itself or to modify system areas.
8. Even systems protected by tight encryption policies, such as for example online banks, are not really safe without the Security System of the present invention, because malicious software, such as for example the Subseven Trojan, can render the encryption useless by sending outside information on everything that is going on in the system at various levels.
9. As one of the consequences of the automatic segregation between programs, if a virus or other malicious program manages to infiltrate the system, it is by default limited to its own Virtual Environment (VE), as defined below in the detailed description, where it cannot cause any damage to the system or to other programs.

Clarification and Definitions

Throughout the patent when variations or various solutions are mentioned, it is also possible to use various combinations of these variations or of elements in them, and when combinations are used, it is also possible to use at least some elements in them separately or in other combinations. These variations are preferably in different embodiments. In other words: certain features of the invention, which are described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are described in the context of a single embodiment, may also be provided separately or in any suitable sub-combination.

Many times for simplicity of understanding we use terms that are most commonly used within Microsoft Windows environment (which is the most common operating system for personal computers), so it should be kept in mind that in other operating systems such as for example Linux or Macintosh some of these might have different names, somewhat different implementations, etc., although the principles are similar.

As used throughout the present specifications and claims, the following words have the indicated meanings:

“Program”, “executable” or “application” is any file or area in memory that contains executable commands, such as for example .exe or .com files, batch files, various Macro files, etc.

“Macro” is an executable written usually in a scripting language and executed by a complex application, such as for example Microsoft’s Outlook or Word.

“DLI.” is a dynamic link library. This term is common for example in all versions of the Windows operating system. In other operating systems it might have different names but the principle is similar. In general it is a term for a set of routines that can be called from executables, loaded and linked into them during run time.

“Device driver” or “Driver” is a software component that allows an operating system to communicate with one or more specific hardware devices attached to a computer, such as for example a hard disk controller, network card or display card. However, this can include also any software component running in the privileged mode - in the Kernel.

“OS” or “operating system” is software responsible for controlling the allocation and usage of computer hardware resources such as for example memory, CPU time, disk space, and peripheral hardware devices.

“IRQ” or “Interrupt request line” is a hardware line over which a hardware device, such as for example an input/output port, keyboard, or disk drive, can send interrupt requests to the central processing unit (CPU). Interrupt request lines are built into the computer’s internal hardware and are assigned different levels of priority so that the CPU can determine the sources and relative importance of incoming service requests. IRQ is an Intel concept to rank Hardware and Software requests according to their importance.

“User” or “users” as used throughout the text are always meant interchangeably to be either user or users. The user or users can be for example the individual user of a computer or computers or a corporation or organization that uses the computers. Therefore, preferably various types of authorizations for example can be given either by the individual user of the computer or for example by the security administrator of the company, or any combination of these. For example some companies might want to give full authority on critical issues only to the system administrator, while others might want to let the employees or certain employees have much more direct control.

“User authorization” as used throughout the text can include also of course additional guidance and options.

"Database" or "Databases" as used throughout the text are always meant interchangeably to be either database or databases.

"Network" as used throughout the text is always interchangeable as either network or networks and represents a connection from a computer (as defined below) by any way to one or more computers or any other compatible communication device.

"File" is one or more areas on one or more disks and may have a definition in the FAT that may be represented as a name, directory, etc. and may have other parameters.

"Registry" is one or more files that may contain operating system and other program settings and mainly managed by the operating system.

"Computer" can refer to a personal computer or workstation or server, or any automated device or gadget with one or more processor or CPU, capable of more than simple arithmetic functions. This can include for example also cellular phones and portable computing devices such as for example a palm pilot. This can include also, for example, computers in cars, which may for example become very important as cars become more automated or even capable of automatic driving, since if hackers are able to damage them for example by Internet or satellite connection, it might even cause life-threatening malfunctions. Other examples can be computers in satellites (In which case, user authorization, when needed, preferably should be requested remotely by encrypted communication with user remote verification), sensitive computer systems in airplanes, etc. So, even though we give the examples usually from a PC and Windows perspective, similar principles can be applied also to palm devices, cellular phones, and other types of computerized devices. Also, "computer" or "computers" as used throughout the text are always meant interchangeably to be either computer or computers. Therefore, whenever the word "computer" or "computers" is used throughout the text of this patent, including the claims, it can mean any of the above defined devices.

"Server" is a computer on a network that is running software that provides data and services to clients over the network. The term server can also apply to a software process that similarly sends information to clients and that appears on the same computer as a client process, or even within the same application.

"Kernel" is the portion of the operating system that manages and controls access to hardware resources. It performs for example: thread scheduling and dispatching, interrupt and exception handling, and multiprocessor synchronization.

"DMA" is Direct Memory Access.

"Image Loading" as used throughout the text refers to an executable code that is being loaded for execution or unloaded/terminated.

"Hooked function" as used throughout the text refers to an executable filtering code placed between the calling code and called function and thus has the ability for example to monitor and/or intercept and/or redefine the function that is being hooked.

"API" stands for Application Programming Interface.

Brief description of the drawings

Fig. 1 shows the preferable main elements of the Security System within a typical structure of an operating system in a computer, with some of the hooked peripheral device drivers, especially those related to storage devices and network devices, and preferable places and ways that the various parts of the Security System are coupled to and interact with the above typical structure.

Fig. 1b shows in more detail a preferable way of interaction between Security System parts with an emphasis on the user interface and a preferred process of permission granting.

Fig. 2 shows in more detail a flow diagram of a preferable way the monitoring and capturing system interacts, monitors, checks and authorizes file hooked functions of the computer's operating system that may be preformed by an application.

Fig. 3 shows in more detail a flow diagram of a preferable way the monitoring and capturing system interacts, monitors, checks and authorizes network hooked functions of the computer's operating system that may be preformed by an application.

Fig. 4 shows in more detail a flow diagram of a preferable way the monitoring and capturing system interacts, monitors, checks and authorizes registry hooked functions of the computer's operating system that may be preformed by an application.

Fig. 5 shows what preferably happens when executable files are being loaded for execution.

Fig. 6 shows in more detail a flow diagram of a preferable way the monitoring and capturing system interacts, monitors, checks and authorizes memory related functions of the computer's operating system that may be preformed by an application.

Fig. 7 shows in more detail a flow diagram of preferable main parts and methods of the Security System database, permission and analysis processes.

Fig. 8 shows in more detail preferable interfaces and operation of a possible variation of using additional hardware, which monitors hardware accesses on the computer's data bus and has a 2-way interface with the Security System's software.

Fig. 9 shows in more detail an overview of a preferable self-preservation method.

Fig. 10 shows in more detail a flow diagram of a preferable method of interception process.

Fig 11 is a graphic illustration of a preferable way in which processes may be segregated and controlled.

Fig 12 is a visual illustration of a more extreme implementation of keeping each program in a 'Bubble' of virtual environment.

Fig 13 is a visual illustration of a preferable configuration of connecting computers in an organization to Internet for example through the system administrator's computer.

Detailed description of the preferred embodiments

All of the descriptions in this and other sections are intended to be illustrative and not limiting.

Referring to Fig. 1, we show the preferred main elements of the Security System (100) within a typical structure of an operating system (101) in a computer (which can be for example a server, a personal computer, or other computerized gadgets or devices as explained in the definitions), with some of the hooked peripheral device drivers, especially those related to storage devices (110) and communication devices (111), and preferable places and ways that the various parts of the Security System (100) are coupled to and interact with the above typical structure. The entire system and method can be regarded also as a virtual machine that performs the described functions.

The Security System is preferably comprised of the following main elements:

- a. A monitoring and capturing system (102), which constantly monitors the security-sensitive elements of the computer system, and preferably especially all the relevant peripheral device activities and preferably especially storage devices (110)(especially the Hard disk or hard disks) and communication devices (111) (network cards, modem, etc.) and can detect and intercept any suspicious and/or detrimental and/or potentially dangerous behaviors. This element of the Security System preferably installs at least some parts of itself as much as possible in the kernel of the operating system (104), and other parts preferably replace various OS files, such as for example certain drivers, device drivers, DLLs, etc. in order to hook various vital functions. The monitoring and intercepting system is defined in more detail in subsequent figures.
- b. Security rules (740) and a database or databases (700) for storing preferably at least one of: default rules (74X-C), a set of pre-distribution preferably acquired rules (74X-B) that are good for most users of the selected operating system, the acquired additional user-defined rules (74X-A), and preferably also the statistics (751) of normal or reasonable behavior of programs, which is continuously learned during the operation of the system. Preferably this database (700) contains in addition to all the authorizations, also an optional log (770) of all the questions that the Security System asked the user and his replies (kept preferably at least for a certain period), and/or, when needed, preferably also a log (770) of suspicious activities detected (kept preferably at least for a certain period) and may contain also for example definable additional logs. The database (700) is preferably encrypted and is considered a constantly monitored high-security protected and preferably backed-up area as

defined below. Therefore, all accesses to the database are supervised by the monitoring and capturing system as explained in more detail in fig. 7.

- c. A user interface (103), which interacts with the user preferably in order to at least one of: learn acceptable behavior patterns, warn the user of all perceived dangers and/or ask for user's authorization or guidance when required. Preferably it also allows the user to view for example statistics and/or behavior logs of any program or groups of programs in the computer that the user defines or programs that are considered strategically important such as for example programs that are allowed to access communication channels. For example one of the activities that is preferably being statistically checked and analyzed is the amount and the data that is being send or received, and preferably for example also the protocol that is being used, and/or other data. Preferably the user may also view or modify directly the database of authorizations, or at least parts of it. Preferably, the user may also choose the security software's tightness at a certain range of severity.

The Security System may also include (as another possible variation) an optional hardware element (800) shown in more detail in Fig. 8, which can alert the Security System's software to any events where access has been made to the security-sensitive ports (803) and/or memory (801) without an apparent corresponding event on the system level as monitored by said Security System's software. Another possible variation is to put a similar element for example, instead or in addition, in the modem or communication card itself, and/or for example in the motherboard or in the CPU itself, and/or for example on the hard disk interface.

Further referring to Fig. 1, preferably the main rules and functions performed by the Security System include at least most of the following:

1. Preferably programs are automatically segregated into their natural environments, so that by default, preferably each program (software application) is allowed to access (for example read, write, execute, create, delete, etc.) files only within its natural environment (which is mainly the directory in which it is installed, its sub-directories, and, preferably for reading only, non-strategic shared files). This way, even applications that are run within other applications, such as for example Java or Active-X within browsers, still have to conform to the security rules together with the browser itself. (Another possible variation is that the user may also ask in advance to protect and monitor only certain directories (or groups of directories), but by default all directories are monitored). If the program is attempting to be installed in the root of any drive, preferably the user interface part (103) of the Security System warns the user about it, and if he allows it, then the natural environment of such programs is limited only to the root of that drive and does not include its sub-directories, otherwise the segregation to branches would be meaningless in this cases. (In the more extreme embodiments explained in the reference to Fig. 11, another possible variation is that the program is given the illusion that it installed itself on the

root of a drive, but in fact it is in a limited Virtual Environment, and thus in a lower directory). Similarly, the Security System preferably constantly monitors, intercepts, and warns the user of any attempts by programs to access the storage devices (110) through direct I/O, since that could render meaningless the segregation rules. (This can be accomplished for example by putting the Security System in ring 0 - Using Intel architecture terms). This can be viewed either as a segregation of programs or of processes, however it is more preferable to implement it according to program files, since for example two or more copies in memory of Netscape will still typically have the same privileges and definitions. On the other hand, if different threads are run by some programs, for example Java or Javascript by Netscape or for example active-X by MSIE, another possible variation is that they can be treated separately as processes, or they can be identified separately anyway for example by the file from which the DLL originates, etc. But even if for example the active-x or Java are run by functions within the browser which are indistinguishable from other internal parts of the browser, according to the above definitions the scope of damage they can do is automatically limited by the limited access the browser itself has outside its normal environment, as explained above. Another way to explain it, which also shows the problematic nature of the prior-of-the-art situation, is to compare the computer to a hotel. Allowing a program to do whatever it likes to other programs or to their data files or to critical files of the operating system is as absurd as letting a guest in a hotel bother any other guests as he pleases, enter their rooms, steal their property or copy it or destroy it, destroy their rooms, etc., or for example have free access to the hotel's safe or electronic switchboard or elevator control room, or phone. The present concept is like limiting each guest by default to his room and limiting by default his access to the Hotel's strategic resources, so that only by explicit permission each guest can get additional privileges. In order to make the segregation more effective, preferably the user is encouraged to place each newly installed software in a separate directory. However, since many users download new files into some common download directory for convenience reasons, there is a possibility that a malicious software will attack (for example delete or corrupt) other files in this download directory when the user tries to install it, or for example read other downloaded files in that directory to find what their default installation directory is and for example also which software is used to open them, and then for example pretend to be related to other programs in the download directory and thus get itself installed in the directories where they were installed. In order to prevent this preferably the security system can use for example context sensitive information, such as for example the time each newly downloaded software was added, so that unreasonable or suspicious behavior can be easily detected if a downloaded program for example starts looking at files that were downloaded at different times, even though they are in the same directory, or starts for example going over the

entire directory and/or tries for example to modify other executables in that directory. As explained, of course various combinations of the above and other variations can also be used.

2. By default, preferably no program is allowed without permission to access and especially to modify or replace sensitive areas or files (as defined below) or device drivers in the storage media (and preferably, to the extent possible, also in the computer's RAM (112)), which are regarded by the Security System as High security areas, such as for example critical operating-system files, registries, INI files, important DLL (Dynamic Link Libraries) files, communication-related files (such as for example Winsock, etc.), the boot sector, the FAT, autoexec or configuration files, the initialization areas of the operating system, the Windows Startup directory, the BIOS, user defined high security files or directories, system files that contain lists of URLs from which drivers can be automatically downloaded without asking the user, all the executable and data files and databases related to the Security System itself, or anything else that may prevent the Security System from continuing functioning properly or initializing properly after the next boot. Similarly, the Security System preferably constantly monitors attempts by various programs to access for example the area of the hard disk used by the operating system for the swap files and/or other cached areas on the disk, since that could also allow various security breaches, such as for example replacing critical DLLs with malicious DLLs while they are cached on the disk during virtual memory swapping. In addition to this, the system may preferably to the extent possible also protect (600) some RAM (112) areas if they are not adequately protected by the computer's operating system (101). For example, there might be a vulnerability that enables applications to access a shared memory area called "System internal object name space" and change the names of DLLs, thus replacing them with references to malicious DLLs. In addition to this, the Security System preferably makes sure (600) that it will not be thrown out of the RAM by other applications that might try to neutralize it, for example by checking all the time that it is not thrown out of the DDB (Device Descriptor Block) by other applications and putting itself all the time in the first place there, and/or for example by the methods described in Fig. 9 about self-preservation. Preferably, unless it is sufficiently done, by the operating system itself, to the extent possible, the Security system also prevents programs from accessing also in memory the code or data of other programs or their drivers or DLLs, etc. (for example unless given explicit permission to do so). This can be done for example by a method that when each application is running, all the pages of other applications are marked as missing, so if the application tries to access their data or code in memory it causes a CPU exception and then the Security System handles it and disallows the access unless the missing page is really a page that belongs to that application. Since in Windows there are for example

a number of API (Application Programming Interface) functions that allow programs to behave like debuggers, thus enabling them to access and/or alter the memory of other programs that are currently running, preferably the Security System asks the user to explicitly authorize programs that he wants to allow such privileges. Another possible variation is that if programs that have not been given special access rights try to access such APIs, they are automatically prevented from that, or even cannot see such APIs. Also, preferably APIs that allow file-handle copying between processes are automatically disabled, or they are allowed to be used only between programs that are running with the same Virtual Environment.

3. In addition to this, as much as possible, preferably most of the high security areas described above in clause 2 are monitored regularly for signs of suspicious changes preferably by means of a hidden fingerprint for each such file which will cease fitting the file if an unauthorized change has occurred, and preferably there are also additional hidden encrypted and regularly refreshed backups of important areas that can be used to restore them in case of damages to them.
4. Preferably any program that tries to access (such as for example send, receive, listen, connect etc.) communication channels (111), including IP address, port and protocol (for example win-sockets and network shared device drivers (300)) needs to get permission from the user (unless it has already been given this privilege). Based on this monitoring, the user is preferably warned and is asked for authorization when needed, inbound or outbound, including any attempts from programs or hackers from the network (120) to connect to the user's computer, and the Security System may also trace-route such attempts on the net (120) in order to find the source of the attack. Preferably on personal computers attempts to communicate from the outside are automatically blocked and logged without bothering the user. Preferably, when the Security System checks or asks for permissions, such as when it asks the user for example if to allow a certain application to access communication channels, it shows additional relevant data apart from the application's name, such as, for example, the full path of where the executable is installed, its size, its date, and/or details such as for example CRC, memory segments, or other identifiers, in order to reduce the chance that some hostile application might for example install itself under some directory and name itself netscape.exe and thus be given inadvertently by the user access to the web. This means also that for example if an application changes after being given certain permissions, the user will be asked again about it and preferably warned explicitly about the change. Similarly, preferably, if another application with the same or similar name is already listed in the Security System's Database, the security system preferably warns the user about this, in order to further avoid confusion. If the user is for example an organization and the organization wants for

example to allow the system administrator to control which applications have access to the web, then for example each time an employee working with a certain computer allows a certain application to access the web, then preferably this can be permitted only if it fits the definitions allowed by the administrator, preferably using various identification marks to make sure that it is indeed an allowed application and not some other executable with the same name. This can be accomplished in a number of possible ways: For example the administrator can define allowed applications with their identification marks and broadcast this once in a while to all the computers in the organizations, and the Security system will allow access to communication channels only to applications that comply with these definitions (preferably these definitions are password-protected and also reside in an area regarded as a high-security area). Another possible variation is that various requests for authorizations (preferably including various identification marks of the applications) are broadcast by the security system directly to the administrator without even asking the employee and preferably remain blocked until authorization can be given by him. Another possible variation is for example that new authorizations given to applications by the employee (or at least authorizations on important issues) are broadcast by the security system also to the administrator, and allowed only if he OKs them. Another possible variation is for example that, at least for certain authorizations, the user has to call the administrator, and only he can authorize them for example with a password. Another possible variation is for example that applications that are allowed to access the web and/or other communication channels reside only in one (or more) computers in the network and the other computers can access them for example only by limited access through local-area network. Various combinations of these and other solutions are also possible. Also, preferably the Security System allows the user to define general limitations on the communication channels (111) allowed to be opened and and/or for example also limitations on types of protocols allowed, which is especially useful in cases where the computer is being used as a server, since in such cases the computer will run most of the time unattended by the user, or for example if the user wants to block automatically all incoming communication attempts and just log them. Additionally, due to the nature of E-mail Macro-viruses, as added security measures, the system preferably constantly monitors the communication channels for outgoing E-mail messages and asks the user for confirmation any time that one or more e-mail messages are being sent out by any program (even authorized programs) or at least and especially when multiple E-mails are being sent out consecutively. Preferably, the Security System also learns by this process various characteristics of the way the user is normally sending e-mail messages, so that whenever sudden unusual characteristics are apparent, preferably a special interception and warning can be issued. For example when sending e-mail normally through a program like outlook express, the relevant

MAPI functions may be called differently and/or other processes may happen differently than for example when sending e-mail from a Visual Basic Script executed by outlook express. In addition to this, since programs that are allowed to access the communication lines (and especially browsers and e-mail programs) are usually a crucial link in Internet related attacks, preferably such programs are always monitored more thoroughly by the Security System, and therefore regarding such programs preferably the user may not tell the Security System to stop asking about various behaviors. Examples of said communication channels in terms of hardware can be the modem, Ethernet card(s), or even the USB (Universal Serial Bus), which can also be used for example for ADSI connection, or any other device that exists or might exist in the future which might be used for communicating data in and out of the computer. This comprehensive covering of all possible communication channels is extremely important, since otherwise the whole security system might be rendered useless. Examples of said communication channels in terms of software can be any of the system functions that can access any of the said hardware devices that can be used for communication, including for example TAPI functions, which can use the modem for sending Faxes, since, otherwise, a malicious application might for example turn off the internal loudspeaker of the modem and dial out and send out stolen data as a Fax. This applies also for example to any access to wireless channels, such as for example Bluetooth or infra-red, since this also can be used for sending data to the computer or stealing data from it. As explained, of course various combinations of the above and other variations can also be used.

5. Preferably, the monitoring & capturing system (102) conducts constant statistical analysis of various events in the computer in order to learn about normal behavior and identify significant deviations from the normal behavior (such as for example sending out significantly more data than usual, accessing more files than usual, etc.). Preferably, especially the programs that have been authorized for use of the communication channels (111) are constantly statistically analyzed and monitored for suspicious deviations from their normal statistical patterns of behavior, so that if such a program for example suddenly starts to access significantly more files than usual or scan large areas of the disk (even if it has been allowed by the user to access areas outside its natural environment) or starts to send out unusual amounts of data, it is preferably immediately intercepted and the user warned and asked for authorization. This is important also in cases that programs start to act strange due to their being changed while already loaded in memory, for example because of some hardware failure or because they were crashed by string overflow (for example accidentally or by malicious buffer overflow takeover), etc. Preferably the security system can also support more than one user working on the same computer with separate statistical information, preferably by keeping

separate user profiles. Another possible variation, preferably in addition to this, is that the security system preferably also checks at least for highly important processes in RAM memory (such as for example in Server applications or applications that have been given privileges, such as for example permission to access communication channels and/or to exceed their natural environments), preferably in short intervals, that its code has not changed in RAM memory (which can happen for example in cases of buffer overflow or in cases of hostile takeover in memory by another process). This can be done for example by checking its COFF format when it is being loaded into memory, in order to know where the code segments are and not be confused by changes in the data segments, and then preferably marking the code with a highly sensitive checksum. Another possible variation is for example making sure at least in important applications that their code is always only in hardware-protected read-only memory segments. This can be done for example by changing their COFF mapping to ensure proper alignment of code into separate pages tagged as read-only, so that any attempts to change them will cause CPU exception.

6. Preferably the Security System monitors as much as possible all attempts of software applications to gain direct port accesses to security sensitive devices (such as for example the modem and network cards (111), hard disk controller, etc.), or to bypass for example the win-socket drivers, since such access could bypass the operating system. Windows NT for example allows only drivers that are installed in ring 0 to access such ports directly, so ordinary applications are automatically prevented from doing this, but some other versions of windows do not enforce this limitation. Therefore, preferably the Security System tries to enforce this as much as possible even on systems where it is not enforced.
7. During its own installation, the Security System preferably performs various checks if various crucial system files are suspicious of being infected already, and in that case might for example recommend to the user to reinstall the operating system before trying to install again the security software.
8. In order to solve the security problems created by the existence of writeable shared directories such as for example the windows temp area, the Security System preferably implements also a new concept: Virtual Shared Directories. This way, each time an executable tries to access such a shared directory, it will be preferably given the illusion that it has accessed it, but in reality, each such executable will be preferably redirected to a separate private sub-directory which only it can access. Similarly, when executables are accessing for example shared keys in the registry, the Security System preferably implements also a Virtual Shared-Keys system such as for example registered components, etc., so that again, preferably the executables are given the illusion that they have accessed the

shared keys, but preferably they are in practice being redirected each to its individual private file of relevant registry keys. Preferably this is implemented also for example when a program needs to install certain files, such as for example DLLs in system directories. Preferably the virtual shared directory is implemented for example by giving the program a logical view of the shared directory or for example only some of the files in it, so that if the program is allowed to see them it preferably sees the original copy (to reduce unnecessary duplication unless needed), but if it changes any of those files, they will in reality be copied into files in the program's individual private area and changed only there (This can be regarded as an extended implementation of the "Copy-on-write" principle). This, in combination with the other rules/functions, and especially rule no.1 (about the automatic segregation), can also be described in other words as a system of multiple automatic sandboxes, or a system in which each program is limited to its own virtual computer or virtual environment. Another possible variation is to use similar virtual sharing also on other shared resources of the computer. As explained, of course various combinations of the above and other variations can also be used.

9. To the extent possible, the Security System preferably also tries to push the operating system or at least parts of it (such as for example the installed physical device drivers and/or the device drivers of the operating system's inner core and/or any other elements that can allow to gain a similar of control or protection and/or additional parts), to the extent possible, from processor ring 0 (privileged) preferably to ring 1 (less privileged), preferably with the aid of an additional component that converts all the needed functions to run in ring 1 instead of ring 0. However it is more preferable to push also the operating system itself or as many parts of it as possible to a higher numbered ring since this allows closing also backdoors or vulnerabilities in the operating system itself. Preferably, the security system runs below the operating system and intercepts the operating system the moment it is being loaded into memory and transfers it preferably to ring 1. Any attempt by the operating system to access ring 0 will now cause a CPU exception, and, in order to increase efficiency, one possible variation is that the security system preferably rewrites on the fly each such command in the operating system code which is running in the computer's RAM to access instead the current ring in which it is in (such as for example ring 1), so that the next time that line of code is accessed in memory, the exception will not occur anymore (until the next boot). Another possible variation is for example to change at least some of the system files on the disk. This is an additional way to block any hidden doors that might exist in the operating system. And of course it allows easier control over the access to system resources. Although these rings are concepts in Intel processors, similar rings or concepts might be used also in other processors. Another possible variation is that the operating system itself moves for example all

the installed physical device drivers for example to ring 1, so that any attempt to access directly any physical devices, such as for example the communications card or the hard disk card, will create a CPU exception and then the operating system decides what to allow or not. But that means adding various features of the Security System to the operating system itself or for example making the security system an integral part the operating system. Another possible variation is that the physical device drivers and/or the operating system or parts of it are for example still in ring 0 but there is a special more privileged area (or areas) within ring 0 or for example below ring 0 (for example ring -1) which can preferably catch all the exceptions caused by the device drivers in ring 0 and/or by the operating system and is preferably immune to attempts by other drivers or by the operating system to neutralize it or take its place. This can be accomplished for example by adding such a special privileged sub-area within ring 0 and/or below ring 0 by a change in the CPU itself. This has the advantage that it can be easily accomplished without having to deal with the complexity of pushing the operation system to a higher ring. The feature of adding additional control below the operating system by defining a special sub-area within ring 0 or an additional ring below ring 0, can be used also independently of other features of this invention, and various elements may be added to this control. Another possible variation is that preferably in addition, in order to prevent device drivers from accessing devices other then those that they are intended to access, preferably each device driver must have a definite type indicator (such as for example disk driver, screen driver, Network card driver, Mouse driver, etc.), and when a new device driver is installed preferably the user is asked specifically if he allows the program to install such a driver. And when a driver runs and/or during its installation preferably the security system and/or the operating system and/or for example a hardware element (for example in the CPU itself) preferably checks that is does not access other physical devices that don't belong to the type it is allowed to access, so that for example a screen driver cannot access directly hardware ports of the disk or of the network card or of the input devices, etc. However, if the drivers are for example in ring 1 and the security system in ring 0, there is no need for special hardware support, since any attempt of the drivers to access direct hardware ports will cause an exception and then the security system can check if the driver should be allowed to access the device it is trying to access. However, if a device driver is limited to a certain type of devices, preferably it is also prevented from accessing directly other drivers that can access other types of devices, otherwise this can bypass the limitations. Another possible variation is that at least some device drivers are associated only with the programs that installed them or with their Virtual Environments, so that for example if a malicious program installs a new keyboard driver that changes for example "yes" to "no" and vice versa or for example steals keystrokes into a log file for later sending it to the

Internet, the only program that can use this driver and thus be affected by it is the program that installed it (or for example other programs that are within its own Virtual Environment). So if there is for example a device driver for an input device, such as for example the mouse or the keyboard, (and/or for example an output device, such as for example the printer or the screen) which is associated only with a certain program, preferably when it is swapped out during multi-tasking, preferably if there are any hardware buffers associated with it, they are preferably also copied and cleared, so that no trace of it can affect other programs. Another possible variation is that the security system or at least part or parts of it (for example any of the parts that are below ring 0) become active even if the computer is booted for example from a floppy drive or CD or network drive or any other source that is not the normal boot area. In other words, the security system or part of it is automatically activated for example by the BIOS or by the processor itself before the normal boot sequence begins. Preferably it is by the processor itself (For example if at least a small part of security system or a special pointer to it is stored for example in a special ROM area in the CPU itself), so that even changing the BIOS's EPROM will not prevent it from becoming active. Another possible variation is that if the security system discovers for example that the BIOS has been compromised or corrupted (for example if it was changed without authorization according to a digital signature or starts to behave suspiciously), preferably the security system can issue a warning and/or restore it from various preferably hidden backups. Another possible variation is that when changes need to be made in the security system itself – for example updates or bug fixes – preferably the user is prompted very explicitly to confirm it and/or for example some physical key needs to be physically attached to the computer or to any of its peripheral devices (such as for example the keyboard or the mouse) during the update in order to allow this to happen. Another possible variation is to require for example such a key for making changes to the BIOS. Similarly, another possible variation is that the security system is also hardware-protected, so that it cannot be removed by any software means. This can be accomplished for example if it or at least a part of it is stored on a ROM device, and for example the CPU itself will issue a warning and/or restore it from various preferably hidden and preferably protected backups and/or stop executing any other programs until the Security system is restored. These features of safety even during foreign boots and/or if the security system was compromised by any other means, can be used also independently of any other features of this invention. Of course, various combinations of the above and other variations are also possible. Another possible variation is to enforce the automatic file segregation among programs by encryption, so that each program for example can only access files or libraries for which it has the access code. As explained, of course various combinations of the above and other variations can also be used.

Among other things, this system and method are important for example for the prevention of theft of highly sensitive codes, such as for example private encryption keys or credit card details. This is important because in the USA a recent legislation regards digital signatures as no less obligating than handwritten signatures, and in other countries there are similar legislations in process. One of the biggest service suppliers in this area bragged that it could take almost infinite time to break the private keys in these digital signatures, but ignored the simple fact that there is no need to break the keys since it is much easier to steal them, for example by a Trojan horse arriving by e-mail or through a web page by exploiting various loopholes in browsers or e-mail programs. Since such a signature can be compelling in any kind of contract, including wills and huge real estate deals especially in places where it comes with a non-repudiation policy, it is clear that the damage from stolen keys can be enormous. This is especially dangerous since many times such private keys are generated and stored for example by the browsers. By enforcing the rules, such as the automatic segregation rules and requesting authorization from the user about any access to any communication channels, such theft can be thoroughly avoided. However, in the cases where the keys are generated or stored by the browsers, preferably additional rules are used in order to identify the directories where these keys are held, otherwise accessing the keys by the browser would be within the browser's default authorization. Also, preferably, in this case the Security System also learns various characteristics of the way the user is normally accessing the keys, so that when sudden unusual characteristics are apparent, preferably a special interception and warning can be issued. Even if hardware cards, such as for example smart cards, are used for storing the encryption keys, these keys might still be stolen by Trojans for example by overwriting parts of the programs that access these cards or by monitoring the data in memory while it is being generated by these programs.

In cellular phones, for example, eventhough they usually don't have yet sophisticated or sensitive operating systems and file systems compared to Windows, for example, and the operating system is usually EPROMM based, still at least some of the principles of the present system and method can be applied, such as for example:

1. The self-defense principles, such as requiring authorization to modify the BIOS's EPROMM and such as outlined for example in Fig. 9, and protecting the system-critical areas, are easier to implement, since the entire operating system and the security system may be on EPROMM or similar non-easily modifiable memory. So, for example, any attempt to modify any EPROMM data needs explicit permission from the user.
2. The RAM memory used for processing data operations is preferably monitored against hostile activities.
3. Since cellular phones and other mobile devices will be used more and more for business transactions, such as buying from e-commerce sites, transferring funds, stock market instructions, etc., the security of sensitive codes such as for example credit card data and especially private encryption keys is extremely important. So, for example, any attempt to access the private encryption Keys in any way preferably needs explicit permission from the user. Preferably in these cases the user is also asked

for a password, which helps for example in cases where the phone is stolen.

4. Any attempt to automatically dial-out or automatically answer incoming calls preferably needs explicit permission from the user, especially if multiple automatic dials are attempted. This prevents any viruses from causing the phone to automatically send messages to various places, or from becoming for example a spying device, recording what is going on in the room and sending it out without the user's knowledge.
5. In case of constant open Internet connection, expected for example in the 3rd generation cellular phones, like in the PC example, preferably no program can access the web without prior user permission and no connection initiated from the outside can come-in without user permission.
6. Any unauthorized access to additional communication channels, such as for example Bluetooth devices also is preferably blocked or has to be authorized by the user.
7. As cellular or mobile or other phones become more sophisticated and computerized or for example integrated with palm devices, they may contain more and more features typical of ordinary computers and operating systems, and then more features of the present system and method may be needed and implemented.

More technical details are described in the following figures.

Fig 1b shows in more detail a preferred interaction between Security System parts with an emphasis on the user interface (preferably graphic user interface) and a preferred process of permission granting. As soon as a program (executable) tries to perform what is considered by the Security System as suspect or potentially dangerous activity (such as for example exceeding the natural environment of the program or trying to access the communication channels), the monitoring and intercepting system (102) immediately stops the program (1002) and may for example ask the user for authorization or block it automatically, and if the user is absent, for example in case of protecting a server, suspect activities may be for example either blocked until the user comes back and/or logged (770), and such decisions are made for example either according to the various sets of security rules (740) and the nature of the suspect or dangerous activity, or by user definition. Preferably, for non-highly dangerous activities (1106), the Security System gives the user options such as for example to abort the offending program immediately, allow only this time, disallow but let the program go on, allow always from now on or until a certain event, stop asking completely about similar breaches for this program, or stop asking completely about similar breaches for all programs in this directory and it's sub-directories. Another possible variation, described later below, is that at least for such activities the security system relies mainly on whether the user or the program initiated the activity, and thus the security system can for example ask the user less questions or no questions if the user initiated the activity, and for example block it or limit it automatically if it was initiated by the program. Of course various combinations of these variations can also be used. If the suspect activity is related to files, the Security Systems preferably asks also if the permission is given only for reading of data or also for modifying data, etc. If the suspect activity is related to communication channels, the system preferably may also for example allow the user to specify which channels to allow the application to use and what related activities to allow. The examples (in all of the figures) are intended to be illustrative and not limiting. Preferably, in order to avoid

careless responses by the user, the user is always asked for authorization in such ways that responding without paying attention will always default to the least dangerous options. Preferably, for highly dangerous activities (1108), such as for example formatting a drive, mass deletion of files, changing hard disk partition information, changing boot area information, installing drivers in levels close to the kernel of the operating system, accessing the high-security areas, or modifying executables that reside outside the natural environment of the offending, executable programs (such as for example exe and com files, batch files, DLLs, MS-DOC, MS-XLS files, or any other file that might contain executable commands), renaming them, renaming directories, or changing the linking of file types with applications that will be run when clicking on them, etc. - the user is warned more explicitly (preferably also with an explanation about the possible implications and causes) and/or for example asked to repeat the authorization twice. Preferably some of these activities are considered more dangerous than others, so there is a hierarchy of potentially dangerous behaviors. Preferably, this is applied in all cases - even for programs that were allowed by the user to exceed their natural environment. Preferably, when the user is asked for authorization, the security system also makes sure that no other programs can enter false answers as if they were entered by the user through the keyboard or the mouse or any other input device, for example by preventing other programs (except the allowed relevant input device drivers) from adding data for example to the buffer of typed keys in memory and the buffer of mouse events, or for example by using the hooking of all keyboard access and all mouse events to make sure that whatever is read for example from the keyboard or mouse is identical to what is in their event buffers or using only the commands that come directly through these hooked functions. Another possible variation of this is that the Security System freezes all other processes while it is waiting for the user's reply, for example at least for highly dangerous activities. Another possible variation of this is that the Security System plants its own keyboard and mouse drivers instead of those normally in use, however this could be problematic when a non-standard keyboard or mouse is used. Another possible variation of this is to use for example a smarter keyboard and/or mouse which uses also encryption preferably with a date & time stamp, like in the communication with the administrator's computer, as explained below. In addition to this, preferably the Security System also controls access to events and to objects (such as for example the edit box) and to the memory of programs such as for example shell32.dll, user32.dll & gdi32.dll (which are related to the Windows user interface, for example when using the standard open file dialogue box), so that programs don't create false events (such as for example pressing the OK button even though it hasn't really been pressed) or for example altering by direct memory access the content of the input line that contains the file name. Preferably this is done for example by replacing at least part of the Operating System's dialogue boxes and preferably intercepting and/or replacing also other components that can request input from the user, so that the Security System has more control on what is happening in them. Similarly preferably the security system also separates between messages and objects at the process level and controls access to messages and preferably scans the messages before they can enter the Operating System's message system in order to catch for example falsifications and/or unreasonable or suspect messages or potentially dangerous messages. Preferably, when programs execute other programs, the executed programs also have the same limitations as the programs that executed them (for example especially being limited to the same Virtual Environment of the executing program), and preferably programs are allowed to send OS messages only to programs which are running within their own Virtual Environments. Preferably the Security system replaces at least some of the OS functions that deal with the OS message system, and

(preferably it attaches to each message an identification that shows if the OS or another application is the source of the message, and if it is an application, preferably also the identification of the application. Preferably, the Security System allows certain messages to be initiated only by the OS, such as for example timer messages, messages that indicate various hardware events, etc. This way, for example, only the Operating System can send a to program a message that indicates what was read from the keyboard or the mouse. These features can be used also independently of any other features of this invention. Preferably these or similar methods can be applied also for example in systems that allow voice commands. Another possible variation of this is to ask the user also for password for at least some of these authorizations, such as for example for highly dangerous activities, which is good also in order to decrease the chance that the authorization will be given by someone else for example while the user is temporarily away. Of course, various combinations of these methods can also be used. Preferably, like in the examples given in function 4 in the reference to Fig. 1, the Security System also preferably identifies if the user or an application initiated a potential security-risk command, such as for example accessing a file outside the natural environment of the program for a program that still does not have that privilege, and so can for example allow more flexibility and less limitations (or even no limitations) if the command was initiated directly by the user than if it was initiated by the application. This can save the need to ask the user for confirmation in cases where he himself directly initiated the command, for example when it is not a highly dangerous activity, so if the program initiated the activity, such as for example trying to exceed its allowed environment then the security system can for example block it automatically. If it is a potentially dangerous activity, such as for example accessing high security areas (for example as explained by the examples above), such as for example accessing an important system data file or executable, preferably the user is also asked to verify it to the Security System even if he already supposedly allowed it to the perpetrating program for example through a dialogue box, or for example the action is simply automatically not allowed and for example the attempt is preferably logged. (Another possible variation is that the virtual shared areas principle is applied in this case, so that for example even if the user allowed it to the program, the program can access in fact only a copy of that file that is copied into its own virtual environment. However, this could still be dangerous, since even the copy of such a system file might for example contain dangerous information, such as for example the user's address book, passwords, directory structure, user privileges, etc. or might have access to a lower driver which has much more rights. Another possible variation in this case is to limit also the driver if accessed later through the copy of the system executable that is in the virtual limited environment of the program, but that might be problematic, especially if that lower driver needs for example access to other highly dangerous areas for its normal operation). When the user allows for example Netscape to access files outside its natural environment, preferably this gives Netscape access right to the selected file only during that session, and preferably the Security system does not assume that the user wants Netscape to be able to see the directory where that file resided. Preferably it is also not allowed to access even that same file again after closing it, without the user's permission. Preferably only by explicit permission to the security system or for example explicit change in the Security System's control table, can the user give a program for example higher-order rights, such as for example accessing a full directory outside its normal environment, or for example the whole computer, which is needed for example for programs that need it such as for example Defrag, or virus scan software, or any other software that legitimately needs to much more free access to the computer, including for example if the user wants to freely run his own compiled programs. But since programs

that are allowed to access the internet, and especially highly strategic programs such as for example Netscape and MSIE, including all of their plug-ins or "helpers", are preferably watched more carefully, as explained above in feature 5 of the reference to Fig. 1, preferably the user is also explicitly warned by the Security System against giving them access rights outside their natural environments. Perhaps the user won't need to give such rights for example to MSIE or Netscape, since it is not needed for their function, but if the user for example wants to write some scripts that really do something with his files and run them for example from Word or Outlook Express or any other Office programs, he himself becomes crippled if he cannot allow the script to actually run with access to where it has to go. But if he gives for example Word those access rights, he might forget to remove them later and then other Scripts can also run with the same rights. This is an additional reason why the additional safeguards are preferably also used. However, in this particular case another possible variation is that the user can give the rights specifically only to the desired script (by allowing it to the Security System), without having to give these rights for example to Word or Outlook Express. For example even if Netscape becomes later for example compromised by buffer overflow attack and even if for some reason the security system takes some time to discover this, the compromised Netscape will still have very little access rights outside its natural environment. And even if for some reason the user has given for example Netscape or MSIE access rights outside its normal environment (for example on purpose or inadvertently or because he was fooled into it by a malicious process for example during the buffer overflow), according to the above specifications preferably the additional safeguard of identifying highly dangerous activities and/or sudden unusual behaviors will spring into action if the malicious code that used for example buffer overflow to enter tries to do anything suspicious or highly dangerous. This will not unduly harass the user, since by definition unusual or highly dangerous activities are not supposed to happen often, and if they do happen, there is a good chance that the user will be happy that he was asked about it. Also, Preferably the user can choose for example if he wants more information and authorization requests from the Security system for example for highly dangerous activities, or if he wants for example most or all highly dangerous activities to be blocked automatically and preferably also logged. Again, in order to make this reliable, the Security System preferably prevents applications from creating the false impression as if the user for example typed something on the keyboard and thus initiated the command, preferably by use of any of the ways described above. However, the mere fact that the user for example typed something on the keyboard or clicked on the mouse, and the program did something, does not prove that indeed the user meant for that something to happen. For example, a malicious program might send an email every time the user clicks on some element in it, but the element says something totally different, so the user is actually being deceived. So preferably the Security System assumes that the user himself initiated a command only if he typed it directly at the operating system level or for example in a dialogue box. Similarly, if for example the Security System relies on the dialogue box of a malicious program and assumes that the user indeed authorized for example accessing a file outside the natural environment and thus does not confirm it again with the user, the user might be deceived by the program to think that he is being asked something totally different. For example the program during installation might use a large list of directories within a small scrolling window and ask the user if it is OK to install in a list of default installation directories, but hidden below is also for example the directory "C:\My Documents". Or the program might use for example confusing buttons or graphics, where "yes" is really "no" and vice versa, etc. In order to prevent this, preferably the Security System disables for example graphic display of questions in the

dialog box or imposes other limitations for programs that use them, or for example asks the user in such a case for additional confirmation. In order to prevent for example misleading textual questions preferably the Security system uses also at least partial semantic analysis of what the user is really being asked, for example by analyzing sentence structures or at least significant word combinations and/or for example using various rules and/or for example a statistical database of commonly used questions, etc. For example in suspicious cases or unfamiliar patterns the security system preferably intervenes and asks the user for confirmation, either each time this happens, or for example after a few positive confirmations the security system learns that this kind of questions is apparently OK. Another possible variation is that the Security system for example guards at least the top line title of the dialogue box, so the when it is an "open file" dialogue box, it will always say so clearly, and if it is a "save file" dialog box it will always say so clearly. This way, even if the user was given a misleading question by a malicious program, he can still know clearly if he is being asked to chose a file for only Read access, or if the file chosen is about to be written or changed. Another possible variation is that, preferably in addition to this, the security system itself keeps a trace of which files where opened only for reading, and thus prevents the program from later writing into those files. Another possible variation, which is especially applicable if the security system is for example an integral part of the operating system itself, is that a new protocol is introduced for dialogue boxes, in which for example only the security systems runs completely the dialogue box and the programs have to indicate preferably in a more structured format, what they want exactly. However, in any case, since a user might mistakenly authorize dangerous things even if asked correctly, just because for example he is asked many consecutive questions in a similar format and does not pay attention, preferably there are always multiple safeguards that can catch the suspicious or malicious activities also later, as explained above. Therefore for example if the user made a mistake or was deceived into allowing a malicious program to access for example Word.exe and the program tries for example to modify the file or insert malicious code into it, the user is preferably explicitly warned about it by the security system even though he supposedly just authorized it to the program that is attempting to modify Word.exe, because it is considered a potentially highly dangerous activity, as explained above. Preferably the user has to explicitly authorize for example compilers to modify executables without warnings. In addition, preferably highly strategic executables, such as for example Word.exe (and preferably also its related files and/or directories), Internet browsers and other programs that were allowed to access the communication channels (and preferably also their related files and/or directories), compilers, and/or for example any ".doc" file or any directories that contain ".doc" files and/or for example source code files and/or directories that contain them (and especially for example any directories with the standard name of "my docs"), and/or for example directories in which the ".doc" files and/or the source code files were created by the user, are preferably considered automatically by the security system as even more important than ordinary executables or files or directories, so any attempts to access them by other programs that are not normally associated with such files or directories are preferably reported to the user even more explicitly. (Otherwise, for example the user might be inadvertently deceived into allowing a program to "install itself" into a directory containing ".doc" files, and then, even if it is implemented by virtual sharing of the directory, all the doc files might be exposed to the program and can later be stolen. Or the user might for example be inadvertently deceived into allowing a program to "install itself" in the directory that an email program, such as for example "Pegasus", uses for sending pending emails). However, in order to avoid further unnecessary questions preferably the user is able to

explicitly associate new programs with such files or directories or tell the Security System to stop asking such questions about them. The security system can identify such strategic executables and/or directories and/or files for example by using predefined rules, and/or by automatically marking programs as highly strategic according to the number and/or types of authorizations they have (such as or example accessing the Internet or accessing multiple directories outside their natural environments), and/or by the fact that the user is using them interactively considerably more than other programs or files or directories, etc. Preferably the user can also explicitly mark for example certain directories and/or for example certain file name extensions as highly protected. So for example in case such a highly strategic executable such as for example Word.exe or Netscape.exe has been changed (for example because the user authorized it to some attacking program by mistake even after being prompted by the security system itself or for example because some buffer overflow for example in a running thread of Netscape allowed hostile code in memory to change also the file Netscape.exe on the disk), the user is preferably warned about it again, especially for example if the changed executable starts behaving differently from normal previous behavior statistics. However, preferably the security system will intercept the attempt of the running thread of Netscape to modify the disk file Netscape.exe as a suspicious behavior, and ask the user for authorization or for example block it automatically. This is very important, since if for example "Word.exe" has been inserted with malicious code, it can either for example start deleting directories (which will preferably be intercepted immediately as again a highly dangerous or suspect activity), or for example it might start secretly sabotaging only the current file that is being edited when the user saves it on exit (or for example sending it out to the Internet), in which case it could take the user much more time to find out what is going on until huge damage has already been caused. Since highly dangerous activities by definition are supposed to occur only rarely, warning the user explicitly is not going to bother the user, since in most cases the question will be justified. For example the only times Word.exe can be modified are for example when the user installed an update to word. Since the user might do this for example only once in a year or two, so he will almost never be bothered about it by the security system, and if he is bothered about it more often, it means that probably indeed some hostile software is trying to compromise Word.exe, in which case the warning is quite justified and the user will be happy that it was intercepted. Preferably the user is warned even more explicitly if a change to an executable is attempted under suspicious circumstances, such as for example trying to modify an executable without changing the date of the file, and/or for example a program in memory trying to change its own executable file on the disk, etc. Another possible variation is that highly strategic programs such as for example Word.exe or MSIE (Microsoft Internet Explorer) and preferably any Operating system files, simply cannot be changed or cannot run EVEN if the user authorizes the change directly to the Security System, unless the update or patch carries a for example digital certificated that proves that it is indeed an authorized and unchanged official patch by the vendor who made the original program, such as for example Microsoft in this case. Preferably, additional definitions of highly dangerous activities may be easily supplied as an update. However, in order to avoid issuing multiple warnings for example while a program is installing itself, preferably the Security System can handle it smartly as a continuous action within the same context. Also, when a new program installs itself, preferably the security system records which files are created by it, in order to be able to identify more easily its associated files even when they are in other areas. Preferably the Security System also analyses during the installation the imported functions in shared DLLs of the program in order to try to anticipate the behavior of the program and its needs. So preferably the

Security System is installed as soon as possible after the operating system is installed, before other applications. (However, as explained above, the Security System can work also for applications installed before it). Also, in order to make this more efficient in organizations, preferably one computer can be used for example for learning all of the segregation rules and various environment parameters for each program and this knowledge can be transferred to all the other computers in the organization, regardless of the order in which the applications are installed in the other computers. Like the examples given in function number 4 in the reference to Fig. 1, If the user is for example an organization and the organization wants for example to allow the system administrator to control some or all of the important authorizations, or all of the authorizations, or for example all the potentially highly dangerous activities, then preferably various or all requests for authorization can be for example referred by the Security system directly to the system administrator instead of or in addition to asking the employee that works with the computer, or for example automatically blocked unless they fit with pre-defined permissions by the administrator (that can preferably be easily updated by him whenever needed), by methods like those described in the relevant examples given in function 4. Also, preferably various information such as for example parameters or suspect behaviors learned on one or more computers can be transferred to other computers, preferably only after authorization by the administrator. Preferably all communications with this authority (such as for example the administrator's computer) are secure and encrypted and preferably include also an exact time and date stamp, in order to prevent malicious programs for example from trying to send false authorizations or reuse old authentic authorizations for generating false authorizations. Also, preferably this communication uses special protocols of the security system instead of the normal network device drivers and protocols of the operating system. Preferably, this can enable also in practice general policy enforcement, so that for example the organization can decide and enforce very easily for example that only a certain set of programs may be run on all or on certain computers, or only certain actions are allowed on all or on certain computers, etc. The various options or variations can be regarded as various possible embodiments. However, some of them can be made available for example as separate products, or for example as various options within the same product. Preferably on each computer in an organization the level of control given to the employee versus the control for example by the system administrator can preferably be set independently for each computer in the organization. Of course, various combinations of the above and other variations can also be used.

A preferable way of viewing and/or modifying the database of authorizations is for example in the form of a table which lists the names and preferably various identification marks of applications allowed to access communication channels (and preferably possibly also a list of which channels), or to exceed their natural environments, or to have any other privileges which normal applications do not have by default, and lists which such privileges they have been given. Some activities might remain unallowed to any applications, such as for example trapping the keyboard device in order to catch keystrokes. Preferably this table includes also various statistical data about the behavior of each program, as explained before. In an organization where most control is in the hands of the system administrator, preferably the security system installed on each computer still runs a similar table and maintains a similar database, however the system can limit what the employee can change without the administrator's authorization. In such an organization, preferably on the administrator's computer this table contains also additional information and controls, such as for example the list of computers connected to the system within the organization, preferably with a unique identifier to each

computer, and preferably with additional statistical information on the behavior of each computer in the list, so that preferably the system can automatically alert the administrator for example whenever a computer in the system starts to deviate significantly from its normal behavior, such as for example unusual disk activity or unusual communications activity. Such data is preferably also logged. Preferably the communication between the administrator's computer and the employees' computers is encrypted and secure. Preferably, in addition to this, the Security System on the administrator's computer constantly sends short communications at short intervals to the other computers in the system in order to be able to notice quickly for example if the Security System on any computer has been damaged or disabled. Preferably, this short communication can contain for example special codes with different keys for each computer, so that only an active Security System can respond to it properly, and so that a different response will come from a working computer where the Security System has been disabled or is not working properly (including for example if the computer was booted from a diskette instead of the hard disk), and no response from a computer that is turned off for example. Another possible variation is that preferably, in addition to this, if the computers in the organization are configured to access the web for example only through one (or more) central gateway computer (which might be the administrator's computer, or a separate computer), as shown in Fig. 13 (so that for example each normal computer in the system does not have an independent modem and only has for example a network card), this might be used as an additional control for catching backdoors that might exist for example even in the operating system itself. In this case, preferably all communications are routed also through the administrator's computer, and the Security System on each computer preferably reports to the Security System on the administrator's computer all the time or at preferably short intervals for example how much data it has allowed to be sent out from the computer's communication channels, so that the Security System on the administrator's computer can preferably notice and intercept immediately or after a short interval communication attempts from computers where the amount of actual communication does not fit the amount reported by the Security System of that computer. In order to find how much data has been actually sent by each computer, the Security System on the administrator's computer can for example check the packet headers by itself or use for this for example the services of the network firewall on the gateway computer if such a firewall is being used, or use some other routing information to know from which computers the data is coming (such other routing information, for example by letting each communication card add its own unique stamp to the data after it leaves the computer, or by other hardware features of each line, is preferable since the source addresses in packet headers can be easily falsified for example by hostile Trojan applications that send out stolen data. If the communication cards adds its unique stamp, preferably it also checks and removes any such stamps that come from the computer in order to avoid falsification, or for example the gateway or the Security System on the administrator's computer can discover such falsification because it will cause redundant stamps). This feature is very important and can be used also independently of other features to find cases where the actual amount of data sent-out does not fit the amount reported, even for example the amount reported by the dialer of the operating system. Another possible variation is that the security system of each computer preferably reports to the Security System on the administrator's computer (or for example on the gateway) in addition to this also additional data identifying the packets that are being sent out, such as for example special CRCs or various statistical characteristics, in order to prevent for example a case where a hidden backdoor (or Trojan that managed to slip through the Security System) blocks exactly the same amount of legitimate outgoing data while

sending the same amount of stolen data so that the total amount of data sent out does not change. If a hostile Trojan application will for example falsify the source address of each packet (for example in a version where no additional hard routing information is available), then the central Security System will either see an illegal source or some other source computer will thus be attributed the additional data, and with the above additional feature the statistics or CRC can also help to pinpoint more easily the computer which has been taken over. Another possible variation is that, instead of or in addition to the above, the Security System of each computer preferably also encrypts the outgoing data packets (or at least their statistics or CRC data or other identifying data or fingerprints or a redundant copy of such data) with a unique identifier for each computer and a special signature (preferably also with a time & date stamp which preferably also changes all the time), preferably like in all the secure control communications with the Security system of the administrator's computer, and the Security System on the administrator's computer or the gateway decrypts the data and allows it to pass only if it is legitimate and thus can discover immediately when some illegal communication is happening. Another possible variation is to use for example the IPSEC protocol for the communication between each computer for example to the gateway and/or administrator's computer, in combination with control information of the Security System that describes at least the amount of data that is sent out each time, so that no packets can be changed or replaced with other packets or replayed. In this case, preferably VPN (virtual Private Network) and IPSEC is required for communications within the internal network, and preferably the gateway computer opens it. This way, the IPSEC and all its negotiations are done by the Security System, and thus attackers cannot use the communication interface below without having to go through the Security System for communication. However, in order to enable the checking of mismatch between what was sent and what was received, preferably the security systems is able to monitor and take into account for example re-broadcasting of presumed lost packets in the socket layer. Of course, more than one administrator can exist. Another possible variation is to use for example for each computer (or each group of computers) a modem or network card or other communications device (111 in Fig 1) capable of monitoring at least the amounts of data sent out so that this communication device can preferably report back to the Security System of the computer how much data actually went out, so that preferably the communications can be immediately blocked and an alert issued if the amount of actual communication does not fit the amount reported by the Security System of that computer. (Preferably the blocking in this case is done by the Security system, however another possible variation is that it can be done also by the communications device itself, or by the administrator's computer or the gateway computer in organizations where all the traffic goes through them). This has the advantage that it can be used also for single computers or small groups of computers that don't use central control, however it could be used also in organizations with central control. Again, this is important and can be used also independently of the other features of this invention to find cases where the actual amount of data sent-out does not fit the amount reported, even for example the amount reported by the dialer of the operating system. Another advantage of this is that there is no problem of falsifying the origin addresses in packet headers, since all packets that reach the modem or network card come from a single computer coupled to it. Additional variations can also be used here like those described above in the case of these checks being done at the gateway or administrator's computer. Preferably if such a communication device is used, it has a firmware that cannot be changed by software but only by physical replacement, in order to reduce the chance for hostile takeover of this device itself, and preferably the communication device is also capable of generating automatically various reports on

outgoing and/or incoming data and preferably the security system makes sure that no other applications can interfere with the device driver of the communication card and thus mess with these reports. Another possible variation of this is for example reporting similarly also how much data went in. Another possible variation in organizations is that reports about such cases of incongruities are reported automatically by these communication devices also (or instead) for example to the system administrator. Of course, various combinations of the above and other variations can also be used.

Fig. 2 shows a preferable method for monitoring, checking and authorizing access to hooked functions that are called due to a disk related action (201) (such as for example file open, file read, file write, file change, disk read, disk write, disk format, etc.). Preferably the function is tunneled to the proper method of access (202) (read, write, query, etc.). Then the Security System retrieves caller's identity (203), retrieves its relevant information from the database (700), if needed, and retrieves the required file action parameters (204) (such as file name, path name, etc.). The parameters are tracked (211) and, if needed, relevant parts are stored in database (700) for further use (for example for statistics). If needed, an access to rules settings in the database (700) is made to check whether the current action is permitted, and the answer's origin is authorized to prevent hacking of the Security System (207). (For example, if the program tries to access a file within its own directory or subdirectory, it is not necessary to access the database). Also, preferably the Security System can take into consideration also if the action was initiated by the user or by the application, as described in Fig. 1b. If hacking was spotted, the Security System preferably proceeds to special termination process (1001). If origin of answer is authenticated as coming indeed from the database, the Security System performs a check whether the action is permitted. If not, the Security System can for example ask permission from the user, or terminate the process, or tell it that something does not exist, or tell it that the request has been done (without actually doing it), or do the above things if the user has not agreed, or choose other actions, preferably depending also on the amount of visibility wanted by the user (1002), and if authorized it passes on the parameters to the original hooked function (212), and, if needed, the database is updated with the new authorization. Also, it should be noted that this and the other figures, and especially the flowcharts are just general examples, and various steps can for example change or be in a different order. In this and preferably also with other types of hooked functions, preferably the security system also prevents applications from accessing directly lower level functions that can access devices, so that for example in case of disk access, applications are also prevented from accessing directly the lower level file system of the kernel or the actual device driver that physically accesses the hard disks (and preferably similarly with device drivers that can access other storage media). Preferably this is done for example by hooking also the lower-level functions and preventing for example calling them not through the normal kernel interface.

Fig. 3 shows a preferable method for monitoring, checking and authorizing access to hooked functions that are called due to a communication related action (301) (such as open connection, close connection, send, receive, etc.). Preferably, the function is tunneled to the proper method of access (302) (send, receive,

etc.). Then the Security System retrieves caller's identity (303), retrieves its relevant information from database (700) and retrieves required communication action parameters (304) (such as handle id, address, protocol, etc.). The parameters are tracked (311) and, if needed, relevant parts are stored in database (700) for further use (for example for statistics). Also, preferably, when possible, the Security System can take into consideration also if the action was initiated by the user or by the application, as described in Fig. 1b. If needed, an access to rules settings in the database (700) is made to check whether the current action is permitted and the answer's origin is authorized to prevent hacking of the Security system (307). If hacking was spotted the Security System preferably proceed to special termination process (1001). If origin of answer is authenticated as coming indeed from the database, the Security System performs a check whether the action is permitted. If not, the Security System can for example ask permission from the user, or terminate the process, or tell it that something does not exist, or tell it that the request has been done (without actually doing it), or do the above things if the user has not agreed, or choose other actions, preferably depending also on the amount of visibility wanted by the user (1002), and if authorized it passes on the parameters to the original hooked function (312), and, if needed, the database is updated with the new authorization. In this and preferably also with other types of hooked functions, preferably the security system also prevents applications from accessing directly lower level functions that can access devices, so that for example in case of network access, applications are also prevented from accessing directly the actual device drivers that physically accesses the communication channels (and preferably similarly with device drivers that can access other storage media). Preferably this is done for example by hooking also the lower-level functions and preventing for example calling them not through the normal kernel interface.

Fig. 4 shows a preferable method for monitoring, checking and authorizing access to hooked functions that are called due to a registry related action (401) (such as for example read, write, change, etc.). Preferably, the function is tunneled to the proper method of access (402) (read, write, etc.). Then the Security System retrieves caller's identity (403), retrieves its relevant information from database (700) and required registry action parameters (404) (such as key, value, etc.). The parameters are tracked (411) and, if needed, relevant parts are stored in database (700) for further use (for example for statistics). An access to rules settings in the database (700) is made to check whether the current action is permitted, answer's origin is authorized to prevent hacking of the Security System (407). If hacking was spotted the Security system preferably proceeds to special termination process (1001). If origin of answer is authenticated as coming indeed from the database, the Security System performs a check whether the action is permitted. If not, the Security System can for example ask permission from the user, or terminate the process, or tell it that something does not exist, or tell it that the request has been done (without actually doing it), or do the above things if the user has not agreed, or choose other actions, preferably depending also on the amount of visibility wanted by the user (1002), and if authorized it passes on the parameters to the original hooked function (412) and, if needed, the database is updated with the new authorization.

Fig. 5 shows what preferably happens when any executable files are being loaded for execution (501) by the operating system. The Security System is notified about it and checks it before it actually starts running. Furthermore, the file is being accessed in an earlier phase (see fig. 2) when the Security System permits the access to the file (for example, if format.exe was denied it won't reach this phase) as it is being accessed before loading into memory (see fig. 2). The Security System preferably tracks file parameters and relevant data (502) (such as for example process id (PID), threads, allocated memory, etc.) for further use, stores them in the database (700) if needed, and passes on the parameters.

Fig. 6 shows a preferable method for monitoring, checking and authorizing access to hooked functions that are called due to a memory related action (601) (such as for example read, write, etc.). Then the Security System retrieves caller's identity (602), retrieves its relevant information from database (700), gets its parts (libraries, etc.) and its self-allocated memory (physical, virtual, etc.) (603), and checks if the process exceeded its memory borders (604). If it exceeded it, the Security System can for example ask permission from the user, or terminate the process, or tell it that something does not exist, or tell it that the request has been done (without actually doing it), or do the above things if the user has not agreed, or choose other actions, preferably depending also on the amount of visibility wanted by the user (1002), otherwise it passes on the parameters to the original hooked function (605). Preferably this feature is implemented to the extent possible since its implementation may be limited or partially limited on various operating systems. The optional additional hardware described in fig. 8 might also be useful in this context if needed.

Referring to fig. 7, we show preferable main parts and methods of a Security System database. The database or parts of it are located in computer's memory and in storage media. Any access to the database is encrypted (701) and its origin identified (702). The authentication is checked (703) and if hacking was spotted the program preferably proceeds to special termination process (1001). If the access is authenticated the database may set or retrieve information (704) from or to the records (740) which preferably contain statistics records (751), Process ID (PID) records (752), additional records (760), log of activity (770) and Security rules (740) which preferably contain info such as for example file records (741), Network records (742) and Registry records (743). Each group of the rule records preferably contains the following information: acquired user's rules, pre-distribution acquires rules, default rules and variant parameters (as described above). If the request is for storing information, the request is performed and returned to caller (706) (one of the Security System inner functions). If the request is for retrieving information, the following preferably occurs: The database keeps track of statistics and analyzes (707). If the Security System spots any suspicious deviation in activity, the answer returned to the caller function is negative and the appropriate explanation passed through (710) (this action is performed when handling information that is not inner security database such as for example PID-752, etc.), otherwise it returns the answer that was retrieved from the database (709).

Referring to Fig. 8, another possible variation is that the Security System may also include an optional hardware element (800) which gathers (804) and/or logs (805) monitored hardware port accesses (803), DMA (801), IRQ (802), etc. Preferably the monitoring hardware mainly monitors access to storage devices (especially hard disk controller) and access to network devices (such as for example modem, network cards, etc.). Preferably, the monitoring hardware has an interface (811) for transfer of information from the Security System's software (104) to said hardware element (800) (such as for example through accessing read and/or write ports in said hardware element (800)) and for immediate feedback to the Security System's software (104) (such as for example through accessing read and/or write ports in said hardware element (800), through interrupts, etc.) so that it can alert the Security System's software (104) to any events that have been defined in the built-in local database (806). The comparison of events between the software monitoring and the hardware monitoring can preferably be done by either the hardware element (800), by the software part of the Security System (104) or by both. When either the hardware element (800) or the Security System's software decides that unknown access has been made to the above monitored hardware without apparent corresponding event on the top system level as monitored by the Security System software (104), the event is intercepted and reported. Monitoring and catching these events enables the Security System to further close any remaining loopholes in the operating system and programs that may override agents hooking, and ultimately even catch and intercept even backdoors in the operating system if they exist.

Referring to Fig. 9, we show an overview of a preferable self-preservation method. Any Security System part that is being called (901) performs a regular check every defined time (902) for all Security System files integrity (903) and its running functions' (as described in fig. 1) integrity (904). If a deviation is found (905), it preferably informs the user for full understanding of the situation and performs a Self-preservation interception and report (1001). In addition to this, in order to protect itself in memory, preferably the security system defines a part of the physical memory so that no other process can access it except by using a limited number of calling gates (such as for example when calling one of the hooked functions), and any other attempt to access this memory area for example for reading or writing causes a CPU exception which transfers control to the Security System. Since the Security system can know from this which application tried to "attack" it, the security system preferably initiates "anti-hacking" measures, such as for example disabling the attacking part of the process, terminating the process, destroying the process's environment, etc.

Referring to Fig. 10, we show a preferable method of the interception process. It preferably contains two major interception routes: The first is a normal interception (1002) - it is used when an executable tries to perform an unauthorized activity. In that case it can for example notify the user (1101) (as described above), blocks the parameters from reaching the original function (1006), and can for example inform the original caller (the program that requested the function) about function failure. The second is a Self-preservation interception (1001). It is used when the Security System detects

an intrusion of any kind by an offensive program or a hacker. In that case preferably it terminates the offensive program immediately (1007) (such as for example unload from memory, etc.) (Method of termination may be different from operating system to another), and the Database (700) is modified so it marks the offensive program and/or its files accordingly (1009) (such as for example not allowing the access to them, etc.). A self-check is being performed (900) (as described in fig. 9) and if the Security System is endangered (1010), it starts Survival emergency procedures (1011) (such as for example reinstall, shutdown parts, reload, etc.). If not, it continues monitoring (1010). Although it may seem from the diagram that in certain cases there might occur endless loops, this is not the case in reality, it only seems so because the diagram is simplified.

Referring to Fig. 11, we show a graphic illustration of a preferable way in which processes may be segregated and controlled. Whenever a process (1111) attempts to access other processes or their natural environments (1113) or possibly important system resources (1114-1124), it has to go through the Security System's interception and decision engine, so that practically a virtual environment or virtual computer (1112) is created around it. However, it should be noted that this graphic illustration is just a possible example. Not all of these functions are necessarily implemented, however, preferably, most or all are implemented. (Category 1122 - other - refers to other possible resources that may be relevant for example in other operating systems or other CPUs, or for example other devices or other virtual environments). A more extreme possible implementation of this concept (as illustrated also in Fig. 12) is for example that every time a new program is installed, it is given the illusion that nothing else exists on the computer but itself and the operating system and the computer resources (For example software and hardware) that it is allowed to see, so that only the user and certain programs such as for example the relevant parts of the Windows directory explorer and privileged programs given special explicit permission by the user or by predefined rules can see the real directory structure and resources. Preferably these permissions can be given either at the level of an entire program, or for example at the level of segments or parts of the program, so for example the part of explorer that deals with the screen does not need to be given permission to access the directory system. This can further limit for example the extent of damage that can be caused by various exploits. This way, it is like an infinite set of new installed computers, each with a clean and new operating system, and each computer runs only one program: For example, one runs Internet Explorer, a second runs Windows Word, a third runs DOOM II, and so on. However, as explained for example in function no. 1 of Fig. 1, of course more than one program can share the same Virtual Environment, since more than one executable can be in the same directory. For this implementation preferably the Security System is the first thing installed after the operating system, and the security system preferably relies mainly on identifying if the user or the program initiated each security-sensitive action in order to decide automatically if to allow it or not, as explained in the reference to Fig. 1b. This way preferably the amount of nagging to the user is reduced to the minimum. However, this still preferably involves additional safeguards, as explained for example in the references to Figs. 1 & 1b and in other sections. So since the

user can see the entire directory structure (or for example at least the allowed parts of it if he has less than root privileges) and the program can only see its own VE (Virtual Environment) unless explicitly given additional rights, preferably all of the actions initiated by the program are automatically limited to the scope of its own VE. As explained in the reference to figs 1&1b, preferably the VE contains mainly its own directory with its sub-directories, but preferably the program or programs in the VE can access also essential non-strategic OS directories or files, preferably for read-only, and if they try to change these files, preferably the file that needs to be changed is copied to the VE and changed only there. However if we take this to the extreme, it creates the problem that when the user tries for example to run an anti-virus scan program or any other program that needs access for example to the entire disks or at least to other directories in order to do its work properly, the program will be able to scan only the scope of its limited VE, and the user might not even notice that the program actually didn't do its job. So, again, preferably there is a mechanism that allows the Security software to ask the user about it and/or at least a mechanism that allows the user to explicitly give these programs the additional access rights that they need, as explained in the reference to Fig. 1b. Another problem is that some programs that can access the Internet, such as for example MSIE, Windows Media player, and others, may behave like integral parts of the operating system or at least might already be installed automatically during the installation of the operating system itself. Therefore, in order to isolate them into their appropriate VE's, preferably the Security system uses various heuristics in order to define the boundaries of their VE's, and/or for example uses predefined rules. These heuristics can include of course automatically limiting them by default to their default directories and subdirectories, as explained for example in the reference to fig. 1, and for example limiting their access to needed DLLs that are in appropriate System areas, to Read-only access. For special programs such as for example Microsoft Word and/or other Microsoft Office programs (which are dangerous also because they can access critical or secret user data files and because they can also access the internet and because various exploits have already been used on them in the past), preferably predefined rules are used anyway, even if they are installed **after** the security system, because they behave in many ways like an integral part of the operating system after they are installed and because they can show some behaviors that would be considered highly suspicious if a normal program performed them. For example, when Word is loaded, it can quickly access multiple directories, even in other drives. Preferably such behaviors are analyzed in advance for creating the predefined rules about them, since such behavior might for example be used for spying purposes or for causing damages, if for example some Internet exploit (such as for example some buffer overflow) manages to take over Word. However, since Word is running in its own VE and therefore cannot see any directories and/or resources other than the resources it is allowed to see, the scope of such scanning behavior is automatically limited anyway. On the other hand, lets consider for example what happens when Word is being installed: Since "C:\My Documents" is created by Word itself and it can even insert various files in it then, it could normally be interpreted that this directory is part of its VE, so it can freely access any ".doc" files it likes in this directory. Now consider for example what will happen if Word (which can also access the

internet) is compromised for example by buffer overflow or for example by an exploit using unsafe active-x and then immediately deletes for example all the ".doc" files. Of course it can do it because it is in its own VE. Or for example the compromised Word process in memory changes for example the disk copy of Word.exe, which is within its VE, and inserts for example a slow Trojan horse which for example secretly sabotages each file as it is being saved (as in the example given in the reference to Fig. 1b), or for example deceives the user into giving it additional access outside its own VE. This is another example why preferably additional safeguards are also used, as explained in the refs. to Figs. 1 & 1b. Apart from for example preventing such changes in executables, another possible variation is for example that after an installation of a program has finished in its VE, any further changes to files in this VE are automatically copied to another sub-VE or related VE or child-VE, which is preferably subject to even more limitations than the original VE. The connection between such related VEs can be for example through pointers (preferably reciprocal) and/or table of relations and/or through encryption. Of course, if the Operating System allows various authorizations to different users, such as for example root user and normal users, the various VEs are preferably limited also within each user space. Another possible variation is to decide for example by predefined rules or by stricter VE rules, that Word cannot even access directly or see any ".doc" files that were saved by the user. However even this is not safe enough without the additional safeguards, since Word for example saves many copies of ".doc" files in temporary files, and since this saving is initiated by Word itself, these files are within its own VE. So now if Word for example becomes compromised for example by buffer overflow, the hostile code might for example make it send out on the Internet all the temporary doc files it can access. And like in the above example, without the additional safeguards, the hostile code can still for example change the disk copy of Word.exe and start sabotaging each time the current ".doc" file. In addition, this implementation still has the same problems as discussed in the reference to Fig 1b, that if the user wants to run for example in any of the Office programs Scripts that can really affect other files, he needs to be able to give these programs or at least these scripts additional access rights. Another possible variation is that when a new program is being installed the user has the option of choosing for example new VE (Virtual Environment) for that program (preferably this is the default), or for example allow it to become part of an already existing VE, so for example if the user is sure that this is indeed a legitimate update of Word, he can allow the update to update and/or inherit all the current VE of Word, or for example allow it to have free access to the entire computer, if for example the user is sure that he is indeed installing now a Windows update for example from an original Windows CD or for example a system update or security patch that he has downloaded directly from Microsoft. So if for example the user installs an anti-virus program that needs to be able to scan the entire disks, he needs to install it at the highest level. But this, again, leaves the user vulnerable to installing by mistake programs at the highest access level that should not be there (for example a malicious program that pretends to be an anti-virus program), so, again, the additional safeguards are preferably also used. And also, preferably the user is able to correct mistakes for example by moving such a program back into a limited VE. Another possible variation is for example not to ask

the user anything or almost anything and rely mainly on the VEs, and preferably also on additional safeguards, so that for example preferably at least some potentially highly dangerous activities are automatically blocked, even if the user apparently authorized them to the perpetrating program (or for example some are automatically blocked and some are decided by asking the user). (Another possible variation is to rely for example only on the VE and thus not ask the user for example about Internet access by programs that are limited in their VE and have not been given any additional access rights, but this embodiment is less preferable, since it would enable for example a compromised Word.exe to send files outside without permission, or a Virus for example to further propagate itself, or for example a zombie program to participate in a DDOS attack (Distributed Denial of Service), or a malicious program for example to simply take over the Internet connection and for example waste or block most or all of the bandwidth). However, If the user is an organization, then for example the system administrator might have much more control, for example as described in any of the relevant variations in the reference to Fig. 1b. In that case the Sys admin can be for example the only one who authorizes programs to be installed with access rights outside their normal VE, and then there is no need for the Security to tell the individual PC users for example if a program cannot function properly since it is trapped in its VE. On the other hand, since the administrator might also make mistakes or his computer might be for example compromised, preferably the additional safeguards are still applied for each computer for example when programs that have higher access rights try to do highly dangerous or suspect activities, or when the user gives such access rights to programs (for example by mistake or on purpose) for example through the dialog box. However, as described in the reference to Fig. 1b, one of the possible variations in this case is that all the warnings are for example sent to the System administrator's computer, and preferably only he can authorize them or not. If shared drives are allowed for example in a network, preferably either only the user is allowed to access files on shared drives on other computers, or for example each program is allowed to see and access in each shared drive only the same VE that it has on its own computer, so that for example it can see only corresponding subdirectories on the other computers. Another possible variation is that it can see the corresponding subdirectories only on shared drives that have the same drive letters as the drive or drives on which its own VE resides. As explained above in the reference to fig. 1b and in function 9 of the reference to Fig. 1, preferably when a device driver attempts to be installed, the user or the administrator is explicitly asked about it, and preferably additional limitations are also used, such as for example limiting each device driver to only one specified type of device or devices, and/or, associating at least some device drivers to only a certain program or VE. Since device drivers that handle for example the storage media (and especially the hard disks), device drivers that handle the computer's memory and device drivers that handle the communication channels, are typically the most strategically important, preferably the user is warned more explicitly about attempts to install such drivers, and/or for example only the administrator is allowed to authorize them, and/or for example such drivers can only come with the operating system itself and/or for example they are replaced by drivers supplied by the security system itself. In device drivers that can access directly for example

the hard disk or the RAM, of enforcing segregation might be problematic, since by their very nature they can be used to by-pass the segregation rules. However, if for example some new game is willing to run only with its own screen driver, preferably, such driver is allowed to be used only within the VE of that game. If this screen driver is indeed limited to access only the screen and cannot leave for example side effects that can affect other programs while swapping out during multi-tasking, then there can be also embodiments where there is no need for permission from the user to install such device drivers. Another possible variation is that even for example drivers that go to the disk can be associated with a certain VE, so if they are for example in ring 1 and the security system in ring 0, the security system decides which actions to allow them to perform according to the definitions of their VE. Another possible variation is that no application is allowed to install any drivers that access directly hardware elements, but only drivers that call the actual hardware drivers. Another possible variation is that for example no applications are allowed to install any drivers at all, since this is needed only in rare occasions. Another possible variation is that for example only device drivers supplied by the operating system itself and/or duly certified and digitally signed device drivers that have not been changed since the certification are allowed, and no application is allowed to install any other device drivers, or at least any device drivers that can access for example the storage media, the memory or the communication cards. Of course, various combinations of the above and other variations can also be used. Since all new programs are installed in their own VE (except when explicitly requested otherwise by the user), it becomes very easy to undo (or at least remove) any installation that has gone bad, for example because of some bug in the operating system or in the program or because it is a malicious program. So the user can very easily request an undo of the installation. However, if the user requests the undo after additional programs have been installed who's VE is for example based in part on the previous VE, then preferably either they are removed too, or for example the security system is able to automatically restore them after removing the problematic program with its VE. Another possible variation is that even if the user for example allows a newly installing program to inherit or overwrite an existing VE, the security system preferably first creates a virtual private environment copy of the modified directories (like described for example in Feature number 8 of the reference to Fig. 1), at least for a certain period, so that the user can preferably still request to undo this if he made a mistake, at least for a certain period. After this period preferably for example the VE limitations can be lifted or this VE is merged with the intended VE. Another possible variation is that the security system backs up all the changed files or directories at least for a certain time and/or keeps for example a rollback log of all changes that were made to the relevant files and directories or even of all changes anywhere in the disk, in order to enable the undo if the user needs it. Another possible variation is that even when the user allows a program to be installed without VE limitations, any changes in the entire hard disk after or during the installation, are completely undo-able at least for a certain time period. This is more comprehensive than the current "undo" feature that Microsoft offers after installing new software, since the current features only allow restoring the registry and system files, and even that not always completely, whereas any other changes to directories or files cannot be

undone. An even more extreme variation is that for example any changes at all that happen on the hard disk (and possibly even on other connected media) at any time are completely undo-able at least for a certain time period, in a way similar for example to the undo feature in a single Word document. This can be enabled for example by creating a backup of each changed file or directory in another area at least for a certain time period or until for example the backup buffer becomes full and older backups have to be deleted automatically. Another possible variation, which saves much more space, is for example to keep preferably a rollback log of all changes for example of directories, files, FAT areas, and/or any other data (such as for example even any low-level changes in disk tracks), so that any changes that were made on the storage media can be rolled back by simply tracing back the log of changes. Preferably this rollback log is based on a circular buffer. Preferably this log is encrypted and is highly guarded and/or is kept also in more than one place, in order to reduce the chance of its destruction by mistake or by some malicious software. This way even if the user has made a horrible mistake and the entire system has been compromised, even the worst damage can preferably still be automatically undone. Since the Security System constantly guards itself and its files and preferably also these logs from any unauthorized changes, it is still safe to activate the undo when the user needs it. Another possible variation of implementing this is that even if the user requested installation without VE limitation, the new program is first installed in a separate VE, and only after a certain time period or after the user authorizes it (and/or for example after the security system checks various parameters to see that things seem ok), the VE limitations are lifted or this VE is merged with the unlimited VE. The various embodiments or features of this invention and especially those described here may be very useful for example in combination with the new Palladium system recently suggested by Microsoft (and/or similar systems that exists or will exist in the future), because the Palladium is like a safety vault in a bank, except that there is only one safe in the entire bank and programs can access this common safe and request various services from it only if they have some signatures that mean that they have been certified by someone and have not been changed since then. The concept of such certification can be very problematic because it means that programs have to be certified in advance in order to be allowed to run on the OS or request certain services from it, so it could make development of new programs problematic, and also various falsifications could insert dangerous Trojan horses or compromise the concept in many other ways. Also, the certification process itself might be of limited value even if for example during the certification various behaviors of new programs are checked, since it could miss the fact that some certified program is actually a Trojan horse designed to explode for example 2 years later or is designed to become for example a spyware for example only under certain conditions that are not discovered while it is being certified, or the certified program has for example numerous security flaws that can later be discovered and exploited. Or the certification might not include any behavior checks but rely only on identifying vendors with some ID and making sure that the certified program has not been changed in any way since its certification, but this could still be very unreliable by itself because of the possibility of falsification and because dangerous behavior of a certified program can be caused for example by error or by some

employee that inserts dangerous code on purpose. And even for example a security patch that has been certified and thus can for example update another certified program might still have for example a falsified certificate or for example is legitimate but inadvertently introduces new vulnerabilities. In contrast, the concept of the automatic segregation can make much better use of the Palladium, because by default any program can request services from that safe only for accessing is own segregated world. In order to make this more efficient in organizations, preferably one computer can be used for example for learning all of the segregation rules and virtual environment parameters for each program, and this knowledge can be transferred to all the other computers in the organization, without the need to install the Security System before the other applications in the other computers. This last option is preferably used for example in organizations that want to install the security system on computers that are already installed with various programs after the Operating System. So preferably that one computer is installed from the beginning with the security system before any other program is installed on the OS, and then preferably all the other programs that are installed on computers in the organization are installed on it in order to learn the basic rules automatically so that they can be transferred to the other computers in the organization. Of course, if the security system is made part of the operating system itself (for example integrated into it by Microsoft, in case of a Microsoft OS such as windows), then the security system is by definition installed always during the installation of the operating system in all new computers that install this new OS, so by definition it is automatically installed before any other program. Preferably, in this case it is also installed for example before any applications that can access the Internet even if those applications are considered an integral part of the Operating system, such as for example MSIE, Microsoft Media Player, etc., so that for example the VE of these applications can be automatically determined during their installation. Another possible variation is that the security system is installed for example BEFORE the operating system or before most other parts of it. Of course various combinations of the above and other variations can also be used, as explained above.

Referring to Fig. 12, we show a visual illustration of the more extreme implementation of keeping preferably each program in a 'Bubble' of virtual environment, so that the application can only see itself (2001) and not other programs or directories except its virtual environment (2002), which contains the operation system and the resources it is allowed to see. Only by explicit permission from the user can the program see other programs or directories or their data or access other system resources.

Referring to Fig. 13, we show a visual illustration of a preferable configuration in a possible variation in which individual computers in an organization (3001-3005), each with its own installation of the Security System, are connected to the Internet (3020) through the central authority's computer, such as for example the system administrator (3010) (or though another gateway computer, such as for example the network's firewall, which supplies information to the central authority about the amount of data actually sent from each computer), with it's own installation of the Security System, so that

the Security System on the central authority's computer can also for example notice and intercept communication attempts from computers where the amount of actual communication does not fit the amount reported by the Security System of that computer, as described in the reference to fig. 1b.

While the invention has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications, expansions and other applications of the invention may be made which are included within the scope of the present invention, as would be obvious to those skilled in the art.

CLAIMS

We claim:

1. A security system for computers, adapted to creating automatic segregation between programs.
2. The system of claim 1, further comprising:
 - a. A monitoring and capturing system;
 - b. A database of security rules, comprising at least one of: a set of default rules, a set of pre-distribution acquired rules that are good for many users of the selected operating system, and acquired additional user-defined rules;
 - c. A user interface, which can interact with the user in order to at least one of: learn acceptable behavior patterns, warn the user of perceived dangers and wait for his authorization whenever necessary.
3. The system of claim 2, wherein:
 - a. Said monitoring and capturing system constantly monitors the security-sensitive elements of the computer system, and mainly all relevant peripheral device activities, and especially storage devices and communication devices, and detects and selectively intercepts any security-sensitive or suspicious or dangerous behaviors and acts upon it in accordance with at least one of default and acquired sets of security rules, and may ask for user authorization and guidance whenever necessary;
 - b. Said database of security rules comprises at least one of: a set of default rules, a set of pre-distribution acquired rules that are good for most users of the selected operating system, and acquired additional user-defined rules, said database being constantly monitored as a high-security protected area;
 - c. Said user interface, which can interact with the user for at least one of: learning acceptable behavior patterns, warning the user of perceived dangers and waiting for his authorization whenever necessary, and allowing the user to view and modify the database of authorizations.
4. The system of claim 2 wherein said user interface at least also warns the user explicitly in cases of potentially highly dangerous activities.
5. The system of claim 2 wherein said database comprises also at least learned statistics of normal and reasonable behavior of programs in the user's computer.
6. The system of claim 2 wherein said user interface at least also allows the user to view statistics of behavior of important programs and especially programs that are allowed to access communication channels, especially in what is related to sending and receiving data over the communication lines.

7. The system of claim 2 wherein said database comprises also at least a log of the questions that the Security System asked the user and his replies kept at least for a certain period.
8. The system of claim 2 wherein said database comprises also at least, when needed, a log of suspicious activities detected kept at least for a certain period.
9. The system of claim 2 wherein said security rules and functions performed by the Security System comprise automatic segregation of programs into their natural environments and at least some of the following functions:
 - a. Constantly monitoring the security-sensitive elements of the computer system, and mainly all relevant peripheral device activities, and especially storage devices and communication devices, and detecting and selectively intercepting security-sensitive behaviors, suspicious behaviors and dangerous behaviors and acting upon them in according with default and acquired sets of security rules.
 - b. At least one of Warning the user and request for authorization and automatic interception for security-sensitive activities and especially any first-time attempts to access communication channels.
 - c. Enabling the user to request at least one of automatic blocking and warning of the user of any attempts of external programs from the network to connect to the user's computer through the communication channels.
 - d. Interception and more explicit warning of the user about potentially highly dangerous activities.
10. The system of claim 9, comprising also at least warning the user about significant statistical deviations from normal behaviors of applications and operating system and especially as relates to suddenly sending out large amounts of data.
11. The system of claim 9, comprising also at least enabling the user to request enforcing of at least one of additional limitations on the communication ports allowed to be opened and when needed also limitations on types of protocols allowed.
12. The system of claim 9, comprising also at least monitoring and intercepting as much as possible all attempts of applications to gain direct port accesses to security sensitive devices and especially the storage media and the communication channels.
13. The system of claim 9, comprising also at least implementing Virtual Shared data areas on the storage media, for at least one of temporary files and accessing keys in the registry and other files, so that programs are given the illusion that they are accessing the shared area, but in reality are each redirected to a separate private area.

14. The system of claim 2, comprising also pushing at least part of the operating system from the most privileged processor ring to a lower privilege ring and enabling needed functions to run in said lower privilege ring.
15. The system of claim 14 wherein said pushing is done in order to catch also backdoors and loopholes in the operating system itself.
16. The system of claim 2 wherein said monitoring and capturing system includes also a hardware element which monitors hardware accesses, so that the Security System can discover events where access has been made to the security-sensitive ports, especially the storage media and the communication channels, without an apparent corresponding event on the system level as monitored by said Security System's software.
17. The system of claim 2 wherein said default automatic segregation is implemented so that, by default, each program is allowed to access, such as read, write, execute, create, and delete, files only within its natural environment.
18. The system of claim 17 wherein said natural environment is mainly the directory in which it is installed, its sub-directories, and - for reading only - non-strategic shared files, unless the program is explicitly given more rights.
19. The system of claim 1 wherein said computer is at least one of a personal computer, a network server, a cellular phone, a palm pilot, a car computer, and/or other computerized gadget.
20. The system of claim 3 wherein high security protected areas are also encrypted.
21. The system of claim 3 wherein high security protected areas are also automatically backed up to as least one more area for additional safety.
22. The system of claim 20 wherein high security protected areas are also automatically backed up to as least one more area for additional safety
23. The system of claim 3 wherein said communication devices include also USB interfaces.
24. The system of claim 3 wherein said communication devices include also at least one of Bluetooth devices and other wireless devices.
25. The system of claim 3 wherein monitoring access to communication devices includes also protocols for sending faxes.

26. The system of claim 9 wherein high security protected areas are also encrypted.
27. The system of claim 9 wherein high security protected areas are also automatically backed up to as least one more area for additional safety.
28. The system of claim 26 wherein high security protected areas are also automatically backed up to as least one more area for additional safety.
29. The system of claim 9 wherein said communication devices include also USB interfaces.
30. The system of claim 9 wherein said communication devices include also at least one of Bluetooth devices and other wireless devices.
31. The system of claim 9 wherein monitoring access to communication devices includes also protocols for sending Faxes.
32. A security method for computers, capable of creating automatic segregation between programs.
33. The method of claim 32, further comprising:
 - a. Providing a monitoring and capturing system;
 - b. Creating and maintaining a database of security rules, comprising at least one of: a set of default rules, a set of pre-distribution acquired rules that are good for many users of the selected operating system, and acquired additional user-defined rules;
 - c. Providing a user interface, which can interact with the user in order to at least one of: learn acceptable behavior patterns, warn the user of perceived dangers and wait for his authorization whenever necessary.
34. The method of claim 33, wherein said main 3 elements are:
 - a. Providing a monitoring and capturing system, which constantly monitors the security-sensitive elements of the computer system, and mainly all relevant peripheral device activities, and especially storage devices and communication devices, and detects and selectively intercepts any security-sensitive or suspicious or dangerous behaviors and acts upon it in accordance with at least one of default and acquired sets of security rules, and may ask for user authorization and guidance whenever necessary;
 - b. Creating and maintaining a database of security rules, comprising at least one of: a set of default rules, a set of pre-distribution acquired rules that are good for most users of the selected operating system, and acquired additional user-defined rules, said database being constantly monitored as a high-security protected area;
 - c. Providing a user interface, which can interact with the user for at least one of: learning acceptable behavior patterns, warning the

user of perceived dangers and waiting for his authorization whenever necessary, and allowing the user to view and modify the database of authorizations.

35. The method of claim 33 wherein said user interface at least also warns the user more explicitly in cases of potentially highly dangerous activities.
36. The method of claim 33 wherein said database comprises also of at least continuously learned statistics of normal and reasonable behavior of programs in the user's computer.
37. The method of claim 33 wherein said user interface at least also allows the user to view statistics of behavior of important programs and especially programs that are allowed to access communication channels, especially in what is related to sending and receiving data over the communication lines.
38. The method of claim 33 wherein said database comprises also of at least a log of the questions that the Security System asked the user and his replies kept at least for a certain period.
39. The method of claim 33 wherein said database comprises also of at least, when needed, a log of suspicious activities detected kept at least for a certain period.
40. The method of claim 33 wherein said security rules and functions performed by the Security System comprise automatic segregation of programs into their natural environments and at least some of the following functions:
 - a. Constantly monitoring the security-sensitive elements of the computer system, and mainly all relevant peripheral device activities, and especially storage devices and communication devices, and detecting and selectively intercepting security-sensitive behaviors, suspicious behaviors and dangerous behaviors and acting upon them in according with default and acquired sets of security rules.
 - b. At least one of Warning the user and request for authorization and automatic interception for security-sensitive activities and especially any first-time attempts to access communication channels.
 - c. Enabling the user to request at least one of automatic blocking and warning of the user of any attempts of external programs from the network to connect to the user's computer through the communication channels,
 - d. Interception and more explicit warning of the user about potentially highly dangerous activities.
41. The method of claim 40, comprising also at least warning the user about significant statistical deviations from normal behaviors of applications and

operating system and especially as relates to suddenly sending out large amounts of data.

42. The method of claim 40, comprising also at least enabling the user to request enforcing of at least one of additional limitations on the communication ports allowed to be opened and when needed also limitations on types of protocols allowed.
43. The method of claim 40, comprising also at least monitoring and intercepting as much as possible all attempts of applications to gain direct port accesses to security sensitive devices and especially the storage media and the communication channels.
44. The method of claim 40, comprising also at least implementing Virtual Shared data areas on the storage media, for at least one of temporary files and accessing keys in the registry and other files, so that programs are given the illusion that they are accessing the shared area, but in reality are each redirected to a separate private area.
45. The method of claim 40, comprising also at least pushing, to the extent possible, at least part of the operating system from the most privileged processor ring to a lower privilege ring and enabling needed functions to run in said lower privilege ring.
46. The method of claim 45 wherein said pushing is done in order to catch also backdoors and loopholes in the operating system itself.
47. The method of claim 40 wherein said monitoring and capturing system includes also a hardware element which monitors hardware accesses, so that the Security System can discover events where access has been made to the security-sensitive ports, especially the storage media and the communication channels, without an apparent corresponding event on the system level as monitored by said Security System's software.
48. The method of claim 40 wherein said default automatic segregation is implemented so that, by default, each program is allowed to access, such as read, write, execute, create, and delete, files only within its natural environment
49. The method of claim 17 wherein said natural environment is mainly the directory in which it is installed, its sub-directories, and - for reading only - non-strategic shared files, unless the program is explicitly given more rights.
50. The method of claim 32 wherein said computer is at least one of a personal computer, a network server, a cellular phone, a palm pilot, a car computer, and/or other computerized gadget.

51. The method of claim 33 wherein high security protected areas are also encrypted.
52. The method of claim 33 wherein high security protected areas are also automatically backed up to as least one more area for additional safety.
53. The method of claim 51 wherein high security protected areas are also automatically backed up to as least one more area for additional safety.
54. The method of claim 34 wherein said communication devices include also USB interfaces.
55. The method of claim 34 wherein said communication devices include also at least one of Bluetooth devices and other wireless devices.
56. The method of claim 34 wherein monitoring access to communication devices includes also protocols for sending Faxes.
57. The method of claim 40 wherein high security protected areas are also encrypted.
58. The method of claim 40 wherein high security protected areas are also automatically backed up to as least one more area for additional safety.
59. The method of claim 57 wherein high security protected areas are also automatically backed up to as least one more area for additional safety.
60. The method of claim 40 wherein said communication devices include also USB interfaces.
61. The method of claim 40 wherein said communication devices include also at least one of Bluetooth devices and other wireless devices.
62. The method of claim 40 wherein monitoring access to communication devices includes also protocols for sending Faxes.
63. A computer security system capable of automatic segregation of programs into their natural environments so that each program is allowed to at least one of access, read, write, execute, create, and delete files only within its natural environment, which is mainly the directory in which it is installed, its sub-directories, and - for reading only - non-strategic shared files, unless specifically given more rights.
64. A method of implementing security in computers by automatic segregation of programs into their natural environments so that each program is allowed to at least one of access, read, write, execute, create and delete files only within its natural environment, which is mainly the directory in which it is installed, its sub-directories, and - for reading only - non-strategic shared files, unless specifically given more rights.

65. A security system in any of cellular phones, car computers, and other computerized gadgets, wherein access to highly sensitive data, such as credit card details or private encryption keys, needs explicit permission by the user.
66. A security system in any of cellular phones, car computers, and other computerized gadgets, wherein any attempt to automatically generate an outgoing communication needs explicit permission by the user.
67. The system of claim 64 wherein any attempt to automatically generate an outgoing communication needs explicit permission by the user.
68. The system of claim 64 wherein any attempts to alter at least one of EMROMM and important system files and sensitive data, need explicit permission by the user.
69. The system of claim 2 wherein the user is an individual.
70. The system of claim 2 wherein the user is an organization and at least some of the control over authorizations is in the hands of at least one central authority, such as the system administrator.
71. The system of claim 70 wherein the Security System of the central authority also automatically checks at least once in a while if the Security System is functioning properly on the other computers.
72. The system of claim 70 wherein the Security System on the central authority's computer can also notice and intercept communication attempts from computers where the amount of actual communication does not fit the amount reported by the Security System of that computer.
73. The system of claim 1 wherein the communications device of each computer can also notice and at least report back to the computer about cases where the amount of actual communication does not fit the amount reported by the Security System of that computer.
74. The system of claim 70 wherein the communications device of each computer can also notice and at least report back to at least one of the computer and the central authority about cases where the amount of actual communication does not fit the amount reported by the Security System of that computer.
75. The system of claim 70 wherein the communications device of each group of computers can also notice and at least report back to at least one of the relevant computer and the central authority about cases where the amount of actual communication does not fit the amount reported by the Security System of that computer.
76. The system of claim 1 wherein by default each program can only see itself and the operating system and the resources (software & hardware) that it is allowed to see, so that it lives in a Virtual Environment (VE).

77. The system of claim 9 wherein by default each program can only see itself and the operating system and the resources (software & hardware) that it is allowed to see, so that it lives in a Virtual Environment (VF).
78. The system of claim 1 wherein the Security System also identifies if the user or the application initiated accessing a file outside the natural environment of the program or other potential security-risk commands and so can allow more flexibility and less limitations if the command was initiated directly by the user than if it was initiated by the application.
79. The system of claim 76 wherein the Security System also identifies if the user or the application initiated accessing a file outside the natural environment of the program or other potential security-risk commands and so can allow more flexibility and less limitations if the command was initiated directly by the user than if it was initiated by the application.
80. The system of claim 78 wherein the Security System also makes sure that programs cannot create the false impression that certain actions were initiated by the user by falsifying user input through one of the input devices.
81. The system of claim 79 wherein the Security System also makes sure that programs cannot create the false impression that certain actions were initiated by the user by falsifying user input through one of the input devices.
82. The system of claim 1 wherein the Security System also makes sure that when it requests authorization no other programs can enter false answers as if they were entered by the user through one of the input devices.
83. The system of claim 9 wherein the Security System also makes sure that when it requests authorization no other programs can enter false answers as if they were entered by the user through one of the input devices.
84. The system of claim 1 wherein in the cases where private keys are generated or stored by the browsers, additional rules are used in order to identify the directories where these keys are held, since otherwise accessing the keys by the browser would be within the browser's default authorization.
85. The system of claim 9 wherein in the cases where private keys are generated or stored by the browsers, additional rules are used in order to identify the directories where these keys are held, since otherwise accessing the keys by the browser would be within the browser's default authorization.
86. The method of claim 34 wherein the user is an organization and at least some of the control over authorizations is in the hands of at least one central authority, such as the system administrator.
87. The method of claim 86 wherein the Security System on the central authority's computer can also notice and intercept communication attempts from

computers where the amount of actual communication does not fit the amount reported by the Security System of that computer.

88. The method of claim 34 wherein the communications device of each computer can also notice and at least report back to the computer about cases where the amount of actual communication does not fit the amount reported by the Security System of that computer.
89. The method of claim 86 wherein the communications device of each computer can also notice and at least report back to the central control about cases where the amount of actual communication does not fit the amount reported by the Security System of that computer.
90. A security system wherein the user is an organization and at least some of the control over authorizations is in the hands of at least one central authority, such as the system administrator and Security System on the central authority's computer can also notice and intercept communication attempts from computers where the amount of actual communication does not fit the amount reported by the software of that computer.
91. A security method wherein the user is an organization and at least some of the control over authorizations is in the hands of at least one central authority, such as the system administrator and Security System on the central authority's computer can also notice and intercept communication attempts from computers where the amount of actual communication does not fit the amount reported by the operating system of that computer.
92. A security system wherein the communications device of each computer can also notice and at least report back to the computer about cases where the amount of actual communication does not fit the amount reported by the software of that computer.
93. A security system wherein the user is an organization and the communications device of each computer can also notice and at least report back to the central control about cases where the amount of actual communication does not fit the amount reported by the software of that computer.
94. A security method wherein the communications device of each computer can also notice and at least report back to the computer about cases where the amount of actual communication does not fit the amount reported by the software of that computer.
95. A security method wherein the user is an organization and the communications device of each computer can also notice and at least report back to the central control about cases where the amount of actual communication does not fit the amount reported by the software of that computer.

96. The system of claim 72 wherein the security system of each computer also encrypts the outgoing data packets with a unique identifier for each computer and reports also additional data identifying the packets that are being sent out, and so that at least one of the communication devices or the central authority can also find out if outgoing data packets have been changed.
97. The system of claim 73 wherein the security system also encrypts the outgoing data packets and reports also additional data identifying the packets that are being sent out, so that the communication devices can also find out if outgoing data packets have been changed.
98. The system of claim 74 wherein the security system of each computer also encrypts the outgoing data packets with a unique identifier for each computer and reports also additional data identifying the packets that are being sent out, and so that at least one of the communication devices or the central authority can also find out if outgoing data packets have been changed.
99. The system of claim 90 wherein the security system of each computer also encrypts the outgoing data packets with a unique identifier for each computer and reports also additional data identifying the packets that are being sent out, and so that at least one of the communication devices or the central authority can also find out if outgoing data packets have been changed.
100. The system of claim 92 wherein the security system also encrypts the outgoing data packets and reports also additional data identifying the packets that are being sent out, so that the communication devices can also find out if outgoing data packets have been changed.
101. The system of any of the above claims wherein the security system intercepts the operating system the moment it is being loaded into memory and transfers it to a higher ring so that any attempt by the operating system to access ring 0 will cause a CPU exception, and in order to increase efficiency the security system rewrites on the fly each such command in the operating system code which is running in the computer's RAM to access instead the current ring in which it is in, so that the next time that line of code is accessed in memory, the exception will not occur anymore until the next boot.
102. The system of any of the above claims wherein if an application changes after being given certain permissions, the user is notified about and asked again for permissions or such changes are automatically prevented.
103. The system of any of the above claims wherein the security system transfers only physical device drivers to a less privileged ring in order to be able to control direct access to physical devices.
104. The system of any of the above claims wherein the operating system itself transfers physical device drivers to a less privileged ring in order to be able to control direct access to physical devices.

105. The system of any of the above claims wherein at least one of the physical device drivers and the operating system are still in ring 0 but there is at least one more privileged area within ring 0 which can catch exceptions caused by at least one of device drivers in ring 0 and the operating system itself.
106. The system of any of the above claims wherein the communication device is also capable of generating automatically various reports on outgoing and/or incoming data and the security system makes sure that no other applications can interfere with the device driver of the communication card and thus interfere with these reports.
107. The system of any of the above claims wherein the communication device is also capable of generating automatically various reports on outgoing and/or incoming data and the security system makes sure that no other applications can interfere with the device driver of the communication card and thus interfere with these reports.
108. The system of any of the above claims wherein at least one of the physical device drivers and the operating system are still in ring 0 but there is at least one more privileged area below ring 0 which can catch exceptions caused by at least one of device drivers in ring 0 and the operating system itself.
109. A security system for computers wherein at least one of the physical device drivers and the operating system are still in ring 0 but there is at least one more privileged area within ring 0 or below ring 0 which can catch exceptions caused by at least one of device drivers in ring 0 and the operating system itself
110. The system of any of the above claims wherein at least one part of the security system becomes active even if the computer is booted from any of a floppy drive or CD or network drive, or any other source that is not the normal boot area.
111. A security system for computers wherein at least one part of the security system becomes active even if the computer is booted from any of a floppy drive or CD or network drive, or any other source that is not the normal boot area.
112. The system of claim 111 wherein said activation is done by at least one of the BIOS and the processor itself before the normal boot sequence begins.
113. The system of claim 111 wherein if the security system discovers that the BIOS has been compromised or corrupted, it can at least one of issue a warning and restore it from various preferably hidden backups.
114. The system of claim 113 wherein the security system can determine that the bios has been compromised or corrupted by at least one of: if it was

changed without authorization according to a digital signature and if it starts to behave suspiciously.

115. The system of claim 111 wherein when changes need to be made in at least one of the security system itself and the BIOS, a physical key needs to be physically attached to any of the computer or any of its peripheral devices
116. The system of any of the above claims wherein the Security System learns during the installation of new programs which files are related to them outside their directory tree.
117. The system of any of the above claims wherein any attempts of programs, initiated by the programs, to exceed their natural environments are automatically blocked by the security system.
118. The system of any of the above claims wherein the Security System is an integral part of the operating system.
119. The system of claim 76 wherein if an application launches another application, the newly launched application is limited to the VE of the launching application.
120. The system of any of the above claims wherein if users download many files into a single download directory, the security system at least one of: uses context sensitive information, and detects if a downloaded program starts looking at files that were downloaded at different times or starts going over the entire directory or tries to modify other executables in that directory.
121. The system of any of the above claims wherein in order to protect the segregation of processes in memory, the Security System asks the user to explicitly authorize programs that he wants to allow to access APIs that allow accessing the memory of other processes.
122. The system of any of the above claims wherein in order to prevent device drivers from accessing devices other than those that they are intended to access, each device driver must have a definite type indicator and is allowed to access only devices of the indicated type.
123. The system of claim 122 wherein each device driver is also prevented from accessing other device drivers that can access other types of devices.
124. The system of any of the above claims wherein the security system replaces at least some of the Operating System's dialogue boxes and other components that can request input from the user, so that the Security System has more control on what is happening in them.
125. The system of any of the above claims wherein programs are allowed to send OS messages only to programs which are running within their own Virtual Environments

126. The system of any of the above claims wherein the Security system replaces at least some of the OS functions that deal with the OS message system, and attaches to each message an identification that shows if the OS or another application is the source of the message, and the Security System allows certain messages to be initiated only by the OS.
127. A security system wherein the Security system replaces at least some of the OS functions that deal with the OS message system, and attaches to each message an identification that shows if the OS or another application is the source of the message, and the Security System allows certain messages to be initiated only by the OS.
128. The system of any of the above claims wherein in order to prevent misleading textual questions the Security system uses also at least partial semantic analysis of what the user is really being asked, by at least one of: analyzing sentence structures or at least significant word combinations and/or using various rules and/or a statistical database of commonly used questions.
129. The system of any of the above claims wherein in order to prevent misleading textual questions the Security system guards at least the top line title of the dialogue box, so the when it is an "open file" dialogue box, it will always say so clearly, and if it is a "save file" dialog box it will always say so clearly.
130. The system of any of the above claims wherein a new protocol is introduced for dialogue boxes, in which only the security systems runs completely the dialogue box and the programs have to indicate in a more structured format, what they want exactly.
131. The system of any of the above claims wherein the security system automatically blocks potentially highly dangerous activities or asks the user for explicit authorization, even if the user supposedly allowed this to an application through the dialog box.
132. The system of any of the above claims wherein the security system knows automatically about at least some highly important user files and directories.
133. The system of claim 132 wherein said files are at least one of ".doc" files and source code files, and said directories are at least directories containing such files, at least if these files were created by the user.
134. The system of claim 132 wherein the security system can identify strategic files and/or directories by at least one of: using predefined rules; automatically marking programs as highly strategic according to the number and/or types of authorizations they have and/or by the fact that the user is using them interactively more than other programs or files or directories; and allowing the user explicitly to mark certain directories and/or certain file name extensions as highly protected.

135. The system of claim 132 wherein the user is explicitly warned by the security system about attempts of programs to access highly important user files or directories even if the user supposedly allowed the program to access them through the dialogue box – if the program is not normally associated with such files or directories.
136. The system of any of the above claims wherein installed drivers can also be associated with Virtual Environments, and thus limited in the scope of their actions.
137. The system of any of the above claims wherein the security system prevents running processes from at least one of: changing their code in memory and changing the disk file of their executable code.
138. The system of any of the above claims wherein at least one of programs that can access the Internet, Browsers, important Operating system files, and other highly strategic programs, cannot be changed or cannot run EVEN if the user authorizes the change directly to the Security System, unless the update or patch carries a digital certificated that proves that it is indeed an authorized and unchanged official patch by the vendor who made the original program.
139. The system of any of the above claims wherein the security system also prevents applications from accessing directly lower level functions that can access devices except by calling them through the normal kernel interface.
140. The system of any of the above claims wherein unless explicitly given additional rights by the user all of the actions initiated by a program are automatically limited to the scope of its own VE.
141. The system of any of the above claims wherein when a new program is being installed the user has the option of choosing a new VE for that program, or allowing it to become an update of an already existing VE, or allowing it to have free access to the entire computer.
142. The system of claim 140 wherein the user is able to correct mistakes, at least for a certain time, by undoing the installation of programs, at least when they are installed in a limited VE.
143. The system of any of the above claims wherein if shared drives are allowed, only the user is allowed to access files on shared drives on other computers, or each program is allowed to see and access in each shared drive only the same VE that it has on its own computer.
144. The system of claim 140 wherein if the user allows a newly installing program to inherit or overwrite an existing VE, the security system first creates a virtual private environment copy of the modified directories, at least for a certain period, so that the user can still request to undo this if he made a mistake, at least for a certain period.

145. The system of claim 140 wherein the security system backs up all the changed files or directories at least for a certain time and/or keeps a rollback log of all changes that were made to the relevant files and directories or even of all changes anywhere in the disk, in order to enable the undo if the user needs it.
146. The system of claim 140 wherein even when the user allows a program to be installed without VE limitations, any changes in the entire hard disk after or during the installation, are completely undo-able at least for a certain time period.
147. The system of any of the above claims wherein any changes that happen on at least one of the hard disk and other connected media are completely undo-able at least for a certain time period, by keeping a rollback log of all changes or of all significant changes.
148. The system of claim 140 wherein even if the user requested installation without VE limitation, the new program is first installed in a separate VE, and only after a certain time period or after the user authorizes it (and/or for example after the security system checks various parameters to see that things seem ok), the VE limitations are lifted or this VE is merged with the unlimited VE.
149. A security system in computers wherein the security system automatically blocks potentially highly dangerous activities or asks the user for explicit authorization.
150. The system of claim 149 wherein said potentially highly dangerous activities are at least 1 of: formatting a drive, mass deletion of files, changing hard disk partition information, changing boot area information, installing drivers in levels close to the kernel of the operating system, modifying executables that reside outside the natural environment of the offending executable programs, renaming them, renaming directories, and changing the linking of file types with applications that will be run when clicking on them.
151. The system of claim 149 wherein the security system can identify at least one of strategic files and strategic directories by at least one of: using predefined rules; automatically marking programs as highly strategic according to the number and/or types of authorizations they have and/or by the fact that the user is using them interactively more than other programs or files or directories; and allowing the user explicitly to mark certain directories and/or certain file name extensions as highly protected.
152. As security system wherein the communication with at least one of a keyboard and a mouse uses encryption in order to prevent falsifying user responses.
153. The security system of claim 152 wherein said encryption includes also a date & time stamp.

Amendments to the claims have been filed as follows

61

AMENDED CLAIMS

We claim:

1. A security system for computers that does not depend on information about the specific identities of malicious programs, wherein said computers are at least one of a personal computer, a network server, a cellular phone, a palm pilot, a car computer, and/or other computerized gadget, comprising at least one of:
 - a. A system for automatic segregation between programs that is applied also to at least one of hard disks and other storage media;
 - b. An independent device that is adapted to notice and intercept whenever the amount of data actually sent out from a computer does not fit the amount reported by at least one of: the Security System installed on the computer, and the communications software of the computer;
 - c. A system for automatically blocking a wide range of potentially highly dangerous activities or asking the user for explicit authorization for them; and
 - d. A system for preventing malicious software from falsifying the user's input.
2. The system of claim 1, further comprising:
 - a. A monitoring and capturing system, which monitors at least one of storage devices and communications devices;
 - b. A database of security rules, comprising at least one of: a set of default rules, a set of pre-distribution acquired rules that are good for many users of the selected operating system, and acquired additional user-defined rules; and
 - c. A user interface, which can interact with the user in order to at least one of: learn acceptable behavior patterns, warn the user of perceived dangers, wait for his authorization whenever necessary, and allow the user to view and modify the database of authorizations.
3. The system of claim 2 wherein at least one of:
 - a. Said user interface at least also warns the user explicitly in cases of potentially highly dangerous activities;

- b. Said database comprises also at least learned statistics of normal and reasonable behavior of programs in the user's computer;
 - c. Said user interface at least also allows the user to view statistics of behavior of important programs and especially programs that are allowed to access communication channels, especially in what is related to sending and receiving data over the communication lines;
 - d. Said database comprises also at least a log of the questions that the Security System asked the user and his replies kept at least for a certain period; and
 - e. Said database comprises also at least, when needed, a log of suspicious activities detected kept at least for a certain period.
4. The system of any of the above claims wherein the security rules and/or functions performed by the Security System comprise automatic segregation of programs into their natural environments and at least one of the following:
- a. Constantly monitoring the security-sensitive elements of the computer system, and mainly all relevant peripheral device activities, and especially storage devices and communication devices, and detecting and selectively intercepting security-sensitive behaviors, suspicious behaviors and dangerous behaviors and acting upon them in according with default and acquired sets of security rules;
 - b. At least one of Warning the user and request for authorization and automatic interception for security-sensitive activities and especially any first-time attempts to access communication channels;
 - c. Enabling the user to request at least one of automatic blocking and warning of the user of any attempts of external programs from the network to connect to the user's computer through the communication channels;
 - d. Interception and more explicit warning of the user about potentially highly dangerous activities;

- e. Warning the user about significant statistical deviations from normal behaviors of applications and operating system and especially as relates to suddenly sending out large amounts of data;
 - f. Enabling the user to request enforcing of at least one of additional limitations on the communication ports allowed to be opened and when needed also limitations on types of protocols allowed;
 - g. Monitoring and intercepting as much as possible all attempts of applications to gain direct port accesses to security sensitive devices and especially the storage media and the communication channels;
 - h. Implementing Virtual Shared data areas on the storage media, for at least one of temporary files and accessing keys in the registry and other files, so that programs are given the illusion that they are accessing the shared area, but in reality are each redirected to a separate private area; and
 - i. Pushing at least part of the operating system from the most privileged processor ring to a lower privilege ring and enabling needed functions to run in said lower privilege ring.
5. The system of any of the above claims wherein said monitoring and capturing system includes also a hardware element which monitors hardware accesses, so that the Security System can discover events where access has been made to the security-sensitive ports, especially the storage media and the communication channels, without an apparent corresponding event on the system level as monitored by said Security System's software.
6. The system of any of the above claims wherein said default automatic segregation is implemented so that, by default, each program is allowed to at least one of access, read, write, execute, create, and delete files only within its natural environment, and said natural environment is mainly the directory in which it is installed, its sub-directories, and - for reading only - non-strategic shared files, unless the program is explicitly given more rights.

7. The system of any of the above claims wherein high security protected areas are at least one of: encrypted, marked with a finger print, and automatically backed up to at least one more area for additional safety.
8. The system of any of the above claims wherein the communication devices include also at least one of USB devices, Bluetooth devices and other wireless devices, and/or wherein the monitoring of access to communication devices includes also protocols for sending Faxes.
9. A security method for computers that does not depend on information about the specific identities of malicious programs, wherein said computers are at least one of a personal computer, a network server, a cellular phone, a palm pilot, a car computer, and/or other computerized gadget, comprising the steps of using at least one of:
 - a. A method for automatic segregation between programs that is applied also to at least one of hard disks and other storage media;
 - b. An independent device that is adapted to notice and intercept whenever the amount of data actually sent out from a computer does not fit the amount reported by at last one of: the Security System installed on the computer, and the communications software of the computer;
 - c. A method for automatically blocking a wide range of potentially highly dangerous activities or asking the user for explicit authorization for them; and
 - d. A method for preventing malicious software from falsifying the user's input.
10. The method of claim 9, further comprising:
 - a. Providing a monitoring and capturing system, which monitors at least one of storage devices and communications devices;
 - b. Creating and maintaining a database of security rules, comprising at least one of: a set of default rules, a set of pre-distribution acquired rules that are good for many users of the selected operating system, and acquired additional user-defined rules; and
 - c. Providing a user interface, which can interact with the user in order to at least one of: learn acceptable behavior patterns,

warn the user of perceived dangers and wait for his authorization whenever necessary.

11. The method of claim 10 wherein at least one of:

- a. Said user interface at least also warns the user explicitly in cases of potentially highly dangerous activities;
- b. Said database comprises also at least learned statistics of normal and reasonable behavior of programs in the user's computer;
- c. Said user interface at least also allows the user to view statistics of behavior of important programs and especially programs that are allowed to access communication channels, especially in what is related to sending and receiving data over the communication lines;
- d. Said database comprises also at least a log of the questions that the Security System asked the user and his replies kept at least for a certain period; and
- e. Said database comprises also at least, when needed, a log of suspicious activities detected kept at least for a certain period.

12. The method of any of the above claims wherein the security rules and/or functions performed by the Security System comprise automatic segregation of programs into their natural environments and at least one of the following:

- a. Constantly monitoring the security-sensitive elements of the computer system, and mainly all relevant peripheral device activities, and especially storage devices and communication devices, and detecting and selectively intercepting security-sensitive behaviors, suspicious behaviors and dangerous behaviors and acting upon them in according with default and acquired sets of security rules;
- b. At least one of Warning the user and request for authorization and automatic interception for security-sensitive activities and especially any first-time attempts to access communication channels;

- c. Enabling the user to request at least one of automatic blocking and warning of the user of any attempts of external programs from the network to connect to the user's computer through the communication channels;
 - d. Interception and more explicit warning of the user about potentially highly dangerous activities;
 - e. Warning the user about significant statistical deviations from normal behaviors of applications and operating system and especially as relates to suddenly sending out large amounts of data;
 - f. Enabling the user to request enforcing of at least one of additional limitations on the communication ports allowed to be opened and when needed also limitations on types of protocols allowed;
 - g. Monitoring and intercepting as much as possible all attempts of applications to gain direct port accesses to security sensitive devices and especially the storage media and the communication channels;
 - h. Implementing Virtual Shared data areas on the storage media, for at least one of temporary files and accessing keys in the registry and other files, so that programs are given the illusion that they are accessing the shared area, but in reality are each redirected to a separate private area; and
 - i. Pushing at least part of the operating system from the most privileged processor ring to a lower privilege ring and enabling needed functions to run in said lower privilege ring.
13. A computer security system capable of automatic segregation of programs into their natural environments so that each program is allowed to at least one of access, read, write, execute, create, and delete files only within its natural environment, which is mainly the directory in which it is installed, its sub-directories, and - for reading only - non-strategic shared files, unless specifically given more rights.
14. A method of implementing security in computers by automatic segregation of programs into their natural environments so that each program is allowed to at least one of access, read, write, execute, create and delete files only within its natural environment, which is mainly the

directory in which it is installed, its sub-directories, and - for reading only - non-strategic shared files, unless specifically given more rights.

15. The Security system of any of the above claims wherein the computer is at least one of: cellular phone, car computer, and other computerized gadget, and wherein at least one of:
 - a. Access to highly sensitive data, such as credit card details or private encryption keys, needs explicit permission by the user.
 - b. Any attempt to automatically generate an outgoing communication needs explicit permission by the user.
 - c. Any attempts to alter at least one of EMROMM and important system files and sensitive data, need explicit permission by the user.

16. The system of any of the above claims wherein the user is an organization and at least some of the control over authorizations is in the hands of at least one of: at least one central authority, and the system administrator.

17. The system of claim 16 wherein the Security System of the central authority and/or of the system administrator performs also at least one of:
 - a. Automatically checking at least once in a while if the Security System is functioning properly on the other computers.
 - b. Noticing and intercepting communication attempts from computers where the amount of actual communication does not fit the amount reported by the Security System of that computer.

18. The system of any of the above claims wherein the communications device of each computer or group of computers is adapted to noticing and at least reporting back to at least one of the relevant computer, a central authority, and the system administrator about cases where the amount of actual communication does not fit the amount reported by the Security System of that computer.

19. The system of any of the above claims wherein by default each program can only see itself and the operating system and the computer resources that it is allowed to see, so that it lives in a Virtual Environment (VE).
20. The system of any of the above claims wherein the Security System also identifies if the user or the application initiated at least one of accessing a file outside the natural environment of the program, and other potential security-risk commands, and so can allow more flexibility and less limitations if the command was initiated directly by the user than if it was initiated by the application.
21. The system of claim 20 wherein the Security System also makes sure that programs cannot create the false impression that certain actions were initiated by the user by falsifying user input through one of the input devices.
22. The system of any of the above claims wherein the Security System also makes sure that when it requests authorization no other programs can enter false answers as if they were entered by the user through one of the input devices.
23. The system of any of the above claims wherein in the cases where private keys are generated or stored by the browsers, additional rules are used in order to identify the directories where these keys are held.
24. The security system of any of the above claims wherein the communications device of each computer is adapted to notice and at least report back to the computer about cases where the amount of actual communication does not fit the amount reported by the software of that computer.
25. The security system of any of the above claims wherein the user is an organization and at least some of the control over authorizations is in the hands of at least one central authority, and the Security System on the central authority's computer and/or the communications device of each computer is adapted to notice and intercept communication attempts from computers where the amount of actual communication does not fit

the amount reported by the at least one of: the software of that computer, and the operating system of that computer.

26. The security method of any of the above claims comprising the steps of using a communications device of each computer which is adapted to notice and at least report back to the computer about cases where the amount of actual communication does not fit the amount reported by the software of that computer.
27. The security method of any of the above claims wherein the user is an organization comprising the steps of using in each computer a communications device that is adapted notice and report back to the computer and/or to the central control about cases where the amount of actual communication does not fit the amount reported by the software of that computer.
28. The system of any of the above claims wherein the Security System learns during the installation of new programs which files are related to them outside their directory tree.
29. The system of any of the above claims wherein any attempts of programs, initiated by the programs, to exceed their natural environments are automatically blocked by the security system.
30. The system of any of the above claims wherein the security system automatically blocks potentially highly dangerous activities or asks the user for explicit authorization, even if the user supposedly allowed this to an application through the dialog box.
31. The security system of any of the above claims wherein the communication with at least one of a keyboard and a mouse uses encryption in order to prevent falsifying user responses.
32. The security system of claim 31 wherein said encryption includes also a date & time stamp.
33. A security system in computers wherein the security system automatically blocks potentially highly dangerous activities or asks the

user for explicit authorization, wherein said potentially highly dangerous activities are at least 1 of: formatting a drive, concurrent deletion of multiple files, changing hard disk partition information, changing boot area information, installing drivers in levels close to the kernel of the operating system, accessing the defined high-security areas, modifying or renaming executables that reside outside the natural environment of the offending executable programs, and changing the linking of file types with applications that will be run when clicking on them.

34. The system of claim 17 wherein the security system of each computer also encrypts the outgoing data packets with a unique identifier for each computer and reports also additional data identifying the packets that are being sent out, and so that at least one of the communication devices or the central authority can also find out if outgoing data packets have been changed.
35. The system of claim 18 wherein the security system also encrypts the outgoing data packets and reports also additional data identifying the packets that are being sent out, so that the communication devices can also find out if outgoing data packets have been changed.
36. The system of claim 24 wherein the security system also encrypts the outgoing data packets and reports also additional data identifying the packets that are being sent out, so that the communication devices can also find out if outgoing data packets have been changed
37. The system of any of the above claims wherein if an application changes after being given certain permissions, the user is notified about and asked again for permissions or such changes are automatically prevented.
38. The system of any of the above claims wherein at least one of the following features exist:
 - a. The security system intercepts the operating system the moment it is being loaded into memory and transfers it to a higher ring so that any attempt by the operating system to access ring 0 will cause a CPU exception, and in order to increase efficiency the

security system rewrites on the fly each such command in the operating system code which is running in the computer's RAM to access instead the current ring in which it is in, so that the next time that line of code is accessed in memory, the exception will not occur anymore until the next boot.

- b. The security system transfers only physical device drivers to a less privileged ring in order to be able to control direct access to physical devices.
- c. The operating system itself transfers physical device drivers to a less privileged ring in order to be able to control direct access to physical devices.
- d. At least one of the physical device drivers and the operating system are still in ring 0 but there is at least one more privileged area within ring 0 which can catch exceptions caused by at least one of device drivers in ring 0 and the operating system itself.
- e. At least one of the physical device drivers and the operating system are still in ring 0 but there is at least one more privileged area below ring 0 which can catch exceptions caused by at least one of device drivers in ring 0 and the operating system itself

39. The system of claim 17 wherein the communication device is also capable of generating automatically various reports on outgoing and/or incoming data and the security system makes sure that no other applications can interfere with the device driver of the communication card and thus interfere with these reports.

40. The system of claim 18 wherein the communication device is also capable of generating automatically various reports on outgoing and/or incoming data and the security system makes sure that no other applications can interfere with the device driver of the communication card and thus interfere with these reports.

41. A security system for computers wherein at least one of the physical device drivers and the operating system are still in ring 0 but there is at least one more privileged area within ring 0 or below ring 0 which can catch exceptions caused by at least one of device drivers in ring 0 and the operating system itself

42. The system of any of the above claims wherein at least one part of the security system becomes active even if the computer is booted from at least one of a floppy drive, CD, network drive, and any other source that is not the normal boot area.
43. The system of claim 42 wherein at least one of the following features exist:
- a. Said activation is done by at least one of the BIOS and the processor itself before the normal boot sequence begins.
 - b. If the security system discovers that the BIOS has been compromised or corrupted, it can at least one of issue a warning and restore it from various preferably hidden backups.
 - c. The security system can determine that the bios has been compromised or corrupted by at least one of: if it was changed without authorization according to a digital signature and if it starts to behave suspiciously.
 - d. When changes need to be made in at least one of the security system itself and the BIOS, a physical key needs to be physically attached to at least one of the computer and any of its peripheral devices.
44. The system of any of the above claims wherein the Security System is an integral part of the operating system.
45. The system of claim 19 wherein if an application launches another application, the newly launched application is limited to the VE of the launching application.
46. The system of any of the above claims wherein if users download many files into a single download directory, the security system at least one of: uses context sensitive information, and detects if a downloaded program starts looking at files that were downloaded at different times or starts going over the entire directory or tries to modify other executables in that directory.
47. The system of any of the above claims wherein in order to protect the segregation of processes in memory, the Security System asks the user

to explicitly authorize programs that he wants to allow to access APIs that allow accessing the memory of other processes.

48. The system of any of the above claims wherein in order to prevent device drivers from accessing devices other than those that they are intended to access, each device driver must have a definite type indicator and is allowed to access only devices of the indicated type.
49. The system of claim 48 wherein each device driver is also prevented from accessing other device drivers that can access other types of devices.
50. The system of any of the above claims wherein the security system replaces at least some of the Operating System's dialogue boxes and other components that can request input from the user, so that the Security System has more control on what is happening in them.
51. The system of claim 19 wherein programs are allowed to send OS messages only to programs which are running within their own Virtual Environments
52. The system of any of the above claims wherein the Security system replaces at least some of the OS functions that deal with the OS message system, and attaches to each message an identification that shows if the OS or another application is the source of the message, and the Security System allows certain messages to be initiated only by the OS.
53. A security system wherein the Security system replaces at least some of the OS functions that deal with the OS message system, and attaches to each message an identification that shows if the OS or another application is the source of the message, and the Security System allows certain messages to be initiated only by the OS.
54. The system of claim 20 wherein at least one of the following features exist:
 - a. In order to prevent misleading textual questions the Security system uses also at least partial semantic analysis of what the user is really being asked, by at least one of: analyzing sentence

structures or at least significant word combinations and/or using various rules and/or a statistical database of commonly used questions.

- b. In order to prevent misleading textual questions the Security system guards at least the top line title of the dialogue box, so the when it is an "open file" dialogue box, it will always say so clearly, and if it is a "save file" dialog box it will always say so clearly.
 - c. A new protocol is introduced for dialogue boxes, in which only the security systems runs completely the dialogue box and the programs have to indicate in a more structured format, what they want exactly.
 - d. The security system automatically blocks potentially highly dangerous activities or asks the user for explicit authorization, even if the user supposedly allowed this to an application through the dialog box.
55. The system of any of the above claims wherein the security system knows automatically about at least some highly important user files and directories.
56. The system of claim 55 wherein at least one of the following features exist:
- a. Said files are at least one of ".doc" files and source code files, and said directories are at least directories containing such files, at least if these files were created by the user.
 - b. The security system can identify strategic files and/or directories by at least one of: using predefined rules; automatically marking programs as highly strategic according to the number and/or types of authorizations they have and/or by the fact that the user is using them interactively more than other programs or files or directories; and allowing the user explicitly to mark certain directories and/or certain file name extensions as highly protected.
 - c. The user is explicitly warned by the security system about attempts of programs to access highly important user files or directories even if the user supposedly allowed the program to

access them through the dialogue box – if the program is not normally associated with such files or directories.

57. The system of claim 19 wherein installed drivers can also be associated with Virtual Environments, and thus limited in the scope of their actions.
58. The system of any of the above claims wherein the security system prevents running processes from at least one of: Changing their code in memory, and Changing the disk file of their executable code.
59. The system of any of the above claims wherein at least one of programs that can access the Internet, Browsers, important Operating system files, and other highly strategic programs, cannot be changed or cannot run EVEN if the user authorizes the change directly to the Security System, unless the update or patch carries a digital certificated that proves that it is indeed an authorized and unchanged official patch by the vendor who made the original program.
60. The system of any of the above claims wherein the security system also prevents applications from accessing directly lower level functions that can access devices except by calling them through the normal kernel interface.
61. The system of claim 19 wherein at least one of the following features exist:
 - a. Unless explicitly given additional rights by the user all of the actions initiated by a program are automatically limited to the scope of its own VE.
 - b. When a new program is being installed the user has the option of choosing a new VE for that program, or allowing it to become an update of an already existing VE, or allowing it to have free access to the entire computer.
 - c. The user is able to correct mistakes, at least for a certain time, by undoing the installation of programs, at least when they are installed in a limited VE.
 - d. If shared drives are allowed, only the user is allowed to access files on shared drives on other computers, or each program is

- allowed to see and access in each shared drive only the same VE that it has on its own computer.
- e. If the user allows a newly installing program to inherit or overwrite an existing VE, the security system first creates a virtual private environment copy of the modified directories, at least for a certain period, so that the user can still request to undo this if he made a mistake, at least for a certain period.
 - f. The security system backs up all the changed files or directories at least for a certain time and/or keeps a rollback log of all changes that were made to the relevant files and directories or even of all changes anywhere in at least one of the hard disk and other storage media, in order to enable the undo if the user needs it.
 - g. Even when the user allows a program to be installed without VE limitations, any changes in the entire hard disk after or during the installation, are completely undo-able at least for a certain time period.
 - h. Even if the user requested installation without VE limitation, the new program is first installed in a separate VE, and only after a certain time period or after the user authorizes it (and/or for example after the security system checks various parameters to see that things seem ok), the VE limitations are lifted or this VE is merged with the unlimited VE.
62. The system of any of the above claims wherein any changes that happen on at least one of the hard disk and other storage media are completely undo-able at least for a certain time period, by keeping a rollback log of all changes or of all significant changes.
63. The system of any of the above claims wherein the security system can identify at least one of strategic files and strategic directories by at least one of: using predefined rules; automatically marking programs as highly strategic according to the number and/or types of authorizations they have and/or by the fact that the user is using them interactively more than other programs or files or directories; and allowing the user explicitly to mark certain directories and/or certain file name extensions as highly protected.



Application No: GB 0230149.7 Examiner: David Midgley
Claims searched: 1a,2-9a,10-12,15-32,34- Date of search: 4 December 2003
40,42-52,54-63

Patents Act 1977 : Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	1a,2-9a,10-12,15-18 at least	WO 01/92981 A2 MAYER & DECHOVICH

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^v:

G4A

Worldwide search of patent documents classified in the following areas of the IPC⁷:

G06F

The following online and other databases have been used in the preparation of this search report :

ONLINE:WPI,EPODOC,JAPIO/PAJ

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.